


octamax

2.75 m height

Technics 04/26

Modular double deck system

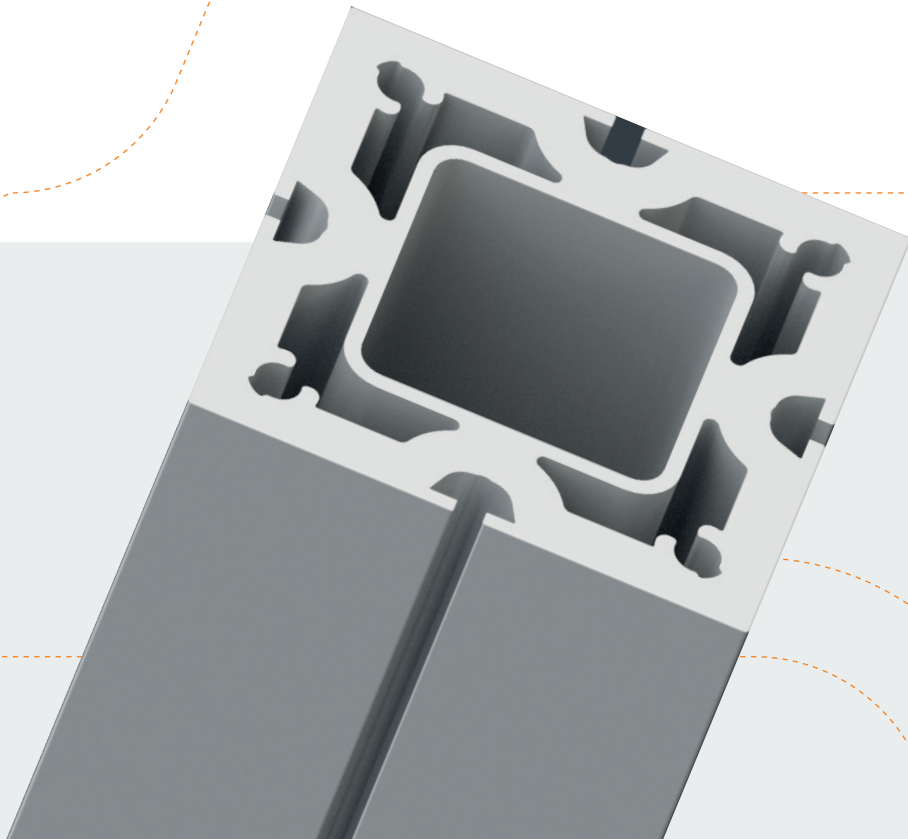


➤ Contents

➤ octamax	
➤ Podest	3
➤ Staircase	8
➤ Railing	13
➤ Handrail	20
➤ Tools	26
➤ Basic modules 3 × 4	27
➤ Basic modules 4 × 4	34
➤ Extension modules	
➤ technical information	37

Upright extrusion

4 system grooves
L 5040 x W 80 x H 80 mm





DFS 84.01

aluminium


as upright, upright extension and upright pylon extension, with 4 system grooves

L 5040 x W 80 x H 80 mm | 38.95 kg



Square extrusion

4 system grooves
L 6000 x W 80 x H 80 mm




U 1020.09

aluminium

4 system grooves

L 6000 x W 80 x H 80 mm | 15.495 kg



Base plate

M8
for DFS 84 / DFL 150





DFL 180.37

steel

for upright DFS 84 / DFL 150, for centre, edge or corner setup, with 6 x drill hole for countersunk screw M8, incl. 4 x countersunk screw M8 x 25 DFL 180/20

L 200 x W 200 x H 8 mm | 2.529 kg



Podest

octamax

Connector

for DFL 150/DFL 421/DFL 423
L 80 × W 80 × H 230 mm





DFL 100.01

aluminium


for fixing to upright extrusion DFL 150 and for mounting of railing posts DFL 421 / DFL 423, for mounting beams in 4 directions, incl. 8 × screw M8

L 80 × W 80 × H 230 mm | 2.22 kg



Supporting beam

pedestal
L 1200 × W 80 × H 230 mm





DFL 576.00

aluminium

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws


L 1200 × W 80 × H 230 mm | 7.646 kg



Attention: use only the bolts supplied

Supporting beam

pedestal
L 1405 × W 80 × H 230 mm





DFL 577.00

aluminium

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws


L 1405 × W 80 × H 230 mm | 12.382 kg



Attention: use only the bolts supplied

Beam adaptor

for DFL 230/DFL 100/DFL 200
L 100 x W 10 x H 182 mm





DFL 211.00

aluminium

to insert in DFL 230/... and to mount at the connector head DFL 100, or at the beam adaptor 90° DFL 200, with 4 x drill hole 11 mm dia. and incl. screw accessories


L 100 x W 10 x H 182 mm | 0.452 kg



Attention: use only the screws supplied

Beam adaptor

for DFL 230 / DFL 502
90°





DFL 200.37

steel

90°, for mounting of intermediate beams DFL 230/... or stair stringer DFL 502 to supporting beam DFL 230/... can be retrofitted, with 2 x thread M10 and 2 x set screw M8 DFL 200/20


L 207 x W 80 x H 29 mm | 0.597 kg



Attention: must be ordered if supporting beam is mounted between supporting beam

Internal connector

for uprights / beams parallel





DFL 580.37

steel

required for parallel positioned uprights or beams, inc. 2 x hammerhead screw M 1471

L 105 x W 25 x H 4 mm | 0.08 kg



Podest

octamax

Panel retainer



with drill hole 4.5 mm dia.
L 24 × W 25 × H 17 mm



E 221.38

steel

with drill hole 4.5 mm dia.
L 24 × W 25 × H 17 mm | 0.013 kg



Fixed wall unit


L 990 × W 80 × H 2518 mm



DFL 340.01

aluminium/steel

consisting of: 1 × upright extrusion M 1018/2510 mm with 2 × tension lock Z 961/8, top 1 × floor panel DFL 340/5, 1 × top pressure tie M 1025/910 mm with 2 × tension lock Z 961/8
L 990 × W 80 × H 2518 mm | 11.487 kg



Fixed wall unit



L 1280 × W 80 × H 2518 mm



DFL 342.01

aluminium/steel


consisting of: 1 × upright M 1018/2510 mm with 2 × tension lock Z 961/8 top, 1 × floor panel DFL 340/5, 1 × top pressure tie M 1025/1200 mm with 2 × tension locks Z 961/8
L 1280 × W 80 × H 2518 mm | 11.23 kg



i will be used in conjunction with stairs

Fixing set


for DFL 150 / DFL 331
L 100 × W 30 × H 32 mm



DFL 310.37

steel

for mounting to upright extrusion DFL 150 and for fixing the vertical cross bracing DFL 331, incl. 2 × screw M8 DFL 310/20
L 100 × W 30 × H 32 mm | 0.218 kg

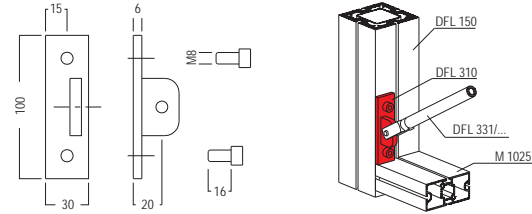

Internal connector


for DFL 331
L 80 × W 80 × H 8 mm



DFL 320.37

steel

for connection of up to 4 vertical cross bracings DFL 331
L 80 × W 80 × H 8 mm | 0.235 kg

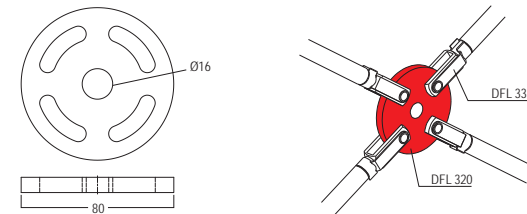

Staircase

octamax

Basic Module

Staircase
straight/angled





DFL 14TVA.01

aluminium/steel

2 × stairs and 1 × quarter landing, including 2 × stair stringer sets, 14 × stair steps, 4 × vertical crossbars, railing support, handrails, etc. Not included: walk-on floor panel for the quarter landing and railing infills. Can be assembled as a straight or angled staircase on the left or right. Prepared for connection to a basic module or staircase landing with a clearance of 1200 mm

L 5457 × W 1360 × H 3936 mm |



Stair stringer

Set - 14 treads
L 4910 × W 130 × H 230 mm





DFL 501.00

aluminium/steel

35°, set is intended for assembling a staircase, consisting of: 1 × stair stringer set DFL 502, 1 × Stair stringer infill DFL 504, permitted live load 5,0 kN/m² in connection with stair treads DFL 533


L 4910 × W 130 × H 230 mm |



Attention: treads are not included!

Stair stringer

L 4910 × W 80 × H 230 mm





DFL 502.00

aluminium/steel

35°, consisting of: 2 × stair stringer DFL 505, 2 × beam connector for stair stringer DFL 512, 2 × foot plate DFL 510

L 4910 × W 80 × H 230 mm | 77.89 kg



Attention: stair stringer infills DFL 503 not included

Staircase

octamax

Infill

infill for DFL 502 bottom





DFL 545.00

wood

infill bottom, to insert into stair stringer DFL 502, consisting of: 1 x stair stringer infill DFL 545-L (bottom), 1 x stair stringer infill DFL 545-R (bottom), flame retardant B - s2 d0

L 1260 x W 221 x H 27 mm |



The filling must be covered.

Infill

infill for DFL 502 center





DFL 543.00

wood

infill center, to insert into stair stringer DFL 502, consisting of: 1 x stair stringer infill DFL 543-L (middle), 1 x stair stringer infill DFL 543-R (middle), flame retardant B - s2 d0

L 1290 x W 221 x H 27 mm |



The filling must be covered.

Infill

infill for DFL 502 top





DFL 541.00

wood

infill top, to insert into stair stringer DFL 502, consisting of: 1 x stair stringer infill DFL 541-L (top), 1 x stair stringer infill DFL 541-R (top), flame retardant B - s2 d0

L 1057 x W 221 x H 27 mm |




The filling must be covered.

Staircase

octamax

Tread support

L 276 × W 50 × H 50 mm





DFL 520.37

steel


incl. fixing screws

L 276 × W 50 × H 50 mm | 0.603 kg



Step

L 1200 × W 310 × H 40 mm





DFL 533.90

wood

with 4 × threaded bushing M8 / steel and 4 × fixing screw M8, flame retardant B - s2 d0

L 1200 × W 310 × H 40 mm | 7.247 kg




The filling must be covered.

Base plate

for stair stringer

L 420 × W 80 × H 38 mm





DFL 510.37

steel

for stair stringer, incl. fixing screw set

L 420 × W 80 × H 38 mm | 2.267 kg




Staircase

octamax

Mounting connector

for stair stringer
L 130 × W 10 × H 240 mm





DFL 512.37

steel

for mounting of a stair stringer DFL 502 to connect head DFL 100 or to beam connector 90° DFL 200, incl. fixing screw set

L 130 × W 10 × H 240 mm | 2.129 kg



Staircase landing

set
1200 × 1485 × 2748 mm





DFL 562.00

aluminium/steel


set, comprised: 2 × upright extrusion DFL 150, 2 × base plate DFL 180, 2 × connector head DFL 100, 2 × supporting beam DFL 576, 2 × supporting beam DFL 577, 3 × beam connector DFL 200

1200 × 1485 × 2748 mm | 91.968 kg



Supporting beam

pedestal
L 1200 × W 80 × H 230 mm





DFL 576.00

aluminium

1 × extrusion cutting made of DFL 230, for pedestal, complete with 2 × beam adaptor DFL 211, cut to size, incl. fixing screws

L 1200 × W 80 × H 230 mm | 7.646 kg




Attention: use only the bolts supplied

Staircase

octamax

Supporting beam

pedestal
L 1405 × W 80 × H 230 mm





DFL 577.00

aluminium

1 × extrusion cutting made of DFL 230, for pedestal, complete with
2 × beam adaptor DFL 211, cut to size, incl. fixing screws


L 1405 × W 80 × H 230 mm | 12.382 kg



Attention: use only the bolts supplied

Cover extrusion

for panel 4 mm
L 6000 × W 22 × H 7 mm





M 1844.35

plastic, semi-hard


for 4 mm panels

L 6000 × W 22 × H 7 mm | 0.42 kg



Cover extrusion

for panel 6 mm
L 6000 × W 22 × H 9 mm





M 1846.35

plastic, semi-hard

for 6 mm panels

L 6000 × W 22 × H 9 mm | 0.51 kg




↗ Railing

octamax

Rectangular extrusion

L 6000 × W 60 × H 40 mm
6000 mm long




M 1082.01

aluminium


tension lock Z 961/8 can be mounted in 2 positions, 6000 mm long

L 6000 × W 60 × H 40 mm | 10.732 kg



Beam extrusion


L 5000 × W 32 × H 16 mm
5000 mm long



Z 303.01

aluminium

L 5000 × W 32 × H 16 mm | 2.7 kg



Railing post

90° corner
L 80 × W 80 × H 1188 mm





DFL 421.01

aluminium

corner, with 4 × thread M8 (bottom) and 1 × end cap DFL 448 (top),

L 80 × W 80 × H 1188 mm | 9.783 kg



➤ Railing

octamax

Railing post

staircase landing
L 80 × W 80 × H 1188 mm





DFL 568.01

aluminium

for staircase landing, with 1 × tension lock adaptor M 1101 and 1 × end cap M 1034

L 80 × W 80 × H 1188 mm | 3.186 kg



Railing post

staircase connection
outside





DFL 423.01

aluminium

outside, for mounting handrail connector DFL 462, outer connection, incl. 8 × thread M8

L 80 × W 80 × H 1112 mm | 8.832 kg



Railing post

staircase connection
inside





DFL 424.01

aluminium

inside, for fixing handrail connector DFL 464 / DFL 466, with 1 × tension lock adaptor M 1101 (bottom) and 4 × thread M8 (top)

L 80 × W 80 × H 1112 mm | 3.123 kg



↗ Railing

octamax

Railing post support

for DFL 230
L 90 × W 60 × H 716 mm





DFL 430.21

steel

can be retrofitted into beam DFL 230/... to achieve the required horizontal load bearing capacity of the handrail at the balustrade of 1,00 kN/m, incl. 2 × fixing screw DFL 430/20, 2 × fixing screw DFL 430/21

L 90 × W 60 × H 716 mm | 2.69 kg



Railing post support

for DFL 100
L 108 × W 9 × H 716 mm





DFL 431.21

steel


for mounting to connector head DFL 100 to achieve the required horizontal load bearing capacity of the handrail at the balustrade of 1,00 kN/m, incl. fixing screws DFL 512/20

L 108 × W 9 × H 716 mm | 2.191 kg



End cap

for extrusions 80 × 80 mm
L 80 × W 80 × H 3 mm





M 1034.35

plastic, light grey

for extrusions 80 × 80 mm, for square extrusions M 1018 /M 1020 and lighttrack mounting extrusion M 1059

L 80 × W 80 × H 3 mm | 0.021 kg




↗ Railing

octamax

End cap



for DFL 421
L 80.3 × W 80.3 × H 3 mm



DFL 448.35

plastic

for railing post DFL 421, with 2 × countersunk screw M5 M 161/20
L 80.3 × W 80.3 × H 3 mm | 0.027 kg



Beam



L 640 × W 16 × H 32 mm



DFL 490.01

aluminium

made of beam extrusion Z 308, incl. 2 × tension lock Z 961/13
L 640 × W 16 × H 32 mm | 0.419 kg



Beam



L 682.5 × W 16 × H 32 mm



DFL 492.01

aluminium

for staircase landing DFL 562, made of beam extrusion Z 308, incl.
2 × tension lock Z 961/13
L 682.5 × W 16 × H 32 mm | 0.473 kg



! Attention: only used in connection with staircase landing DFL 562

↑ Railing

octamax

Beam

L 930 × W 16 × H 32 mm




DFL 493.01

aluminium

made of beam extrusion Z 308, incl. 2 × tension lock Z 961/13

L 930 × W 16 × H 32 mm | 0.565 kg

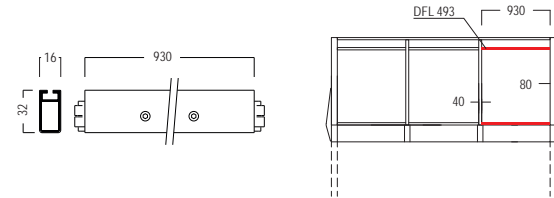

Beam

L 950 × W 16 × H 32 mm




DFL 495.01

aluminium

made of beam extrusion Z 308, incl. 2 × tension lock Z 961/13

L 950 × W 16 × H 32 mm | 0.571 kg

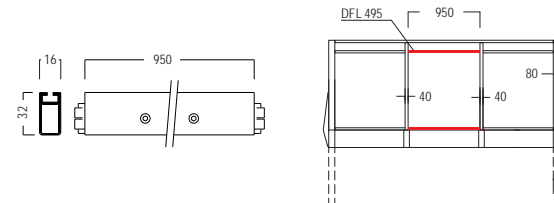

Beam

for DFL 562

L 1200 × W 16 × H 32 mm




DFL 496.01

aluminium

for staircase landing DFL 562, made of beam extrusion Z 308, incl. 2 × tension lock Z 961/13

L 1200 × W 16 × H 32 mm | 0.699 kg

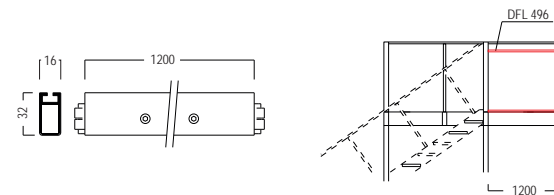

! Attention: only used in connection with staircase landing DFL 562

↗ Railing

octamax

Glass retainer

for glass 12 mm
L 45 × W 27.5 × H 63 mm




M 1467.39

zinc die cast

for mounting to system groove 4.3 mm, for glass thickness 12 mm, with 1 × hammerhead screw M 1470/Ha (M8)

L 45 × W 27.5 × H 63 mm | 0.265 kg

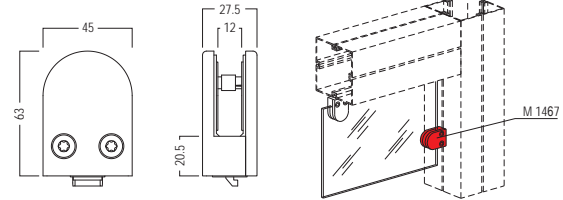

Glass retainer

for glass 13.5 mm
L 67 × W 38 × H 55 mm




M 1492.39

zinc die cast


for glass thickness 13.5 mm, for mounting to system groove 4.3 mm, with 1 × hammerhead screw M 1470/Ha (M8)

L 67 × W 38 × H 55 mm | 0.459 kg



Cover extrusion

for panel 4 mm
L 6000 × W 22 × H 7 mm



M 1844.35

plastic, semi-hard

for 4 mm panels

L 6000 × W 22 × H 7 mm | 0.42 kg




↗ Railing

octamax

Cover extrusion

for panel 6 mm
L 6000 × W 22 × H 9 mm





M 1846.35

plastic, semi-hard

for 6 mm panels

L 6000 × W 22 × H 9 mm | 0.51 kg



Handrail

octamax

Handrail extrusion


1 axis
L 910 × W 76 × H 31 mm



DFL 401.01

aluminium

1 axes, with 2 × hammerhead bolt M 1145
L 910 × W 76 × H 31 mm | 1.071 kg

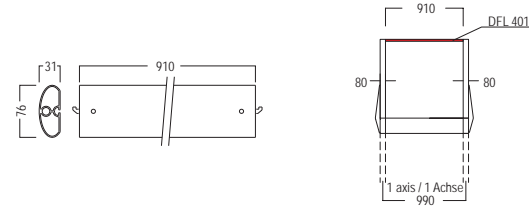

Handrail extrusion


2 axes
L 1900 × W 76 × H 31 mm



DFL 402.01

aluminium

2 axes, with 2 × hammerhead bolt M 1145
L 1900 × W 76 × H 31 mm | 2.27 kg

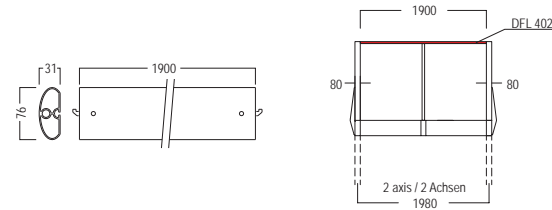

Handrail extrusion


3 axes
L 2890 × B 76 × H 31 mm



DFL 403.01

aluminium

3 axes, with 2 × hammerhead bolt M 1145
L 2890 × B 76 × H 31 mm | 3.592 kg

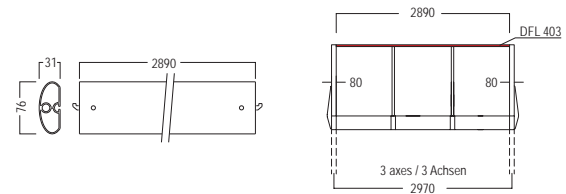

Handrail

octamax

Handrail extrusion


4 axes
L 3880 x W 76 x H 31 mm



DFL 404.01

aluminium

4 axes, with 2 x hammerhead bolt M 1145
L 3880 x W 76 x H 31 mm | 4.775 kg

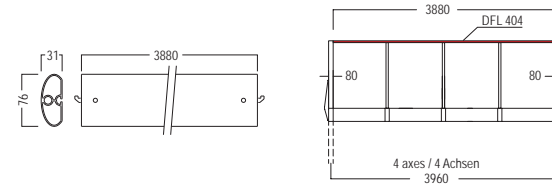

Handrail extrusion


for DFL 464/N / DFL 466/N
L 590 x W 76 x H 31 mm



DFL 481.01

aluminium

for handrail connector DFL 464/N / DFL 466/N, with 1 x hammerhead bolt M 1145/Ha and 2 x set screw E 111/6x6 (M6)
L 590 x W 76 x H 31 mm | 0.677 kg

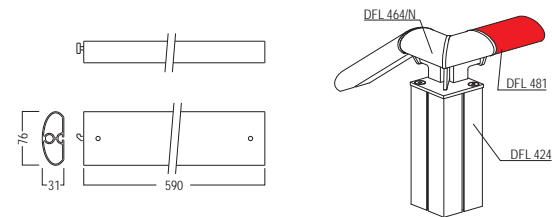

Handrail extrusion


for DFL 562
L 1405 x W 76 x H 31 mm



DFL 426.01

aluminium

for staircase landing DFL 562, with 2 x hammerhead bolt M 1145
L 1405 x W 76 x H 31 mm | 1.613 kg

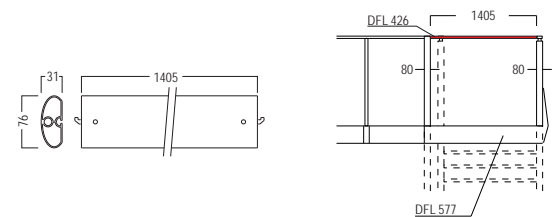

Attention: only for stair landing DFL 562

Handrail

octamax

Handrail extrusion


for DFL 562
L 2600 x W 76 x H 31 mm



DFL 429.01

aluminium

for stair landing DFL 562, with 2 x hammerhead bolt M 1145
L 2600 x W 76 x H 31 mm | 2.985 kg

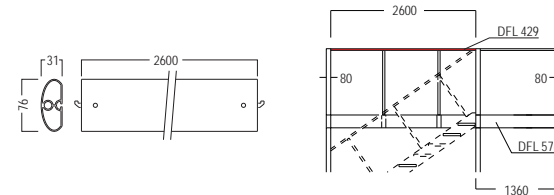

Attention: only for stair landing DFL 562

Handrail extrusion


for DFL 462 / DFL 562
L 1315 x W 76 x H 31 mm



DFL 440.01

aluminium

one-side 17.5° mitered for handrail connector DFL 462 and for stair landing DFL 562, with 1 x hammerhead bolt M 1145
L 1315 x W 76 x H 31 mm | 1.51 kg

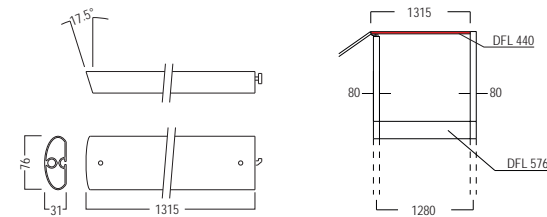

Attention: only for stair landing DFL 562

Handrail extrusion


for DFL 462
L 2015 x W 76 x H 31 mm



DFL 442.01

aluminium

one-side 17.5° mitered for handrail connector DFL 462, with 1 x hammerhead bolt M 1145
L 2015 x W 76 x H 31 mm | 2.318 kg

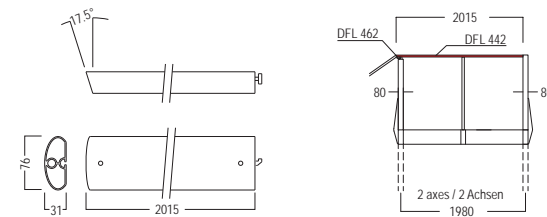

Handrail

octamax

Handrail extrusion

for DFL 462
L 3005 x W 76 x H 31 mm




DFL 443.01

aluminium

one-side 17.5° mitered for handrail connector DFL 462, with 1 x hammerhead bolt M 1145

L 3005 x W 76 x H 31 mm | 3.501 kg

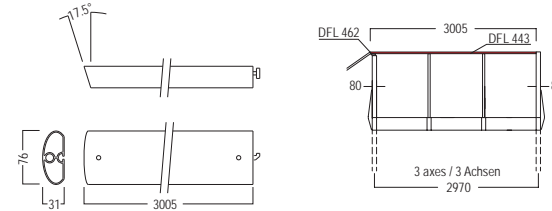

Handrail extrusion

for DFL 462
L 3995 x W 76 x H 31 mm




DFL 444.01

aluminium


one-side 17.5° mitered for handrail connector DFL 462, with 1 x hammerhead bolt M 1145

L 3995 x W 76 x H 31 mm | 4.683 kg

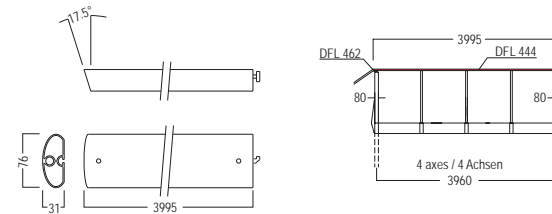

Handrail extrusion

for DFL 435
stair "end piece"




DFL 470.01

steel/aluminium

end piece, to be used with handrail extrusion DFL 435 at the bottom, with 1 x end plate DFL 410 and 1 x clamping screw M6

L 76 x W 31 x H 120 mm | 0.33 kg

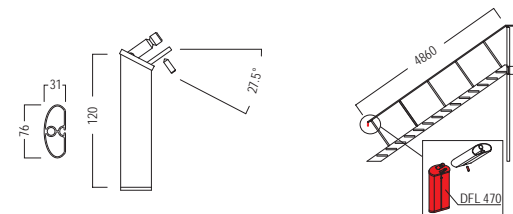


Handrail

octamax

Handrail connector

straight
L 90 × W 82 × H 77 mm





DFL 462.21

steel

straight, to be used with staircase (top), with 2 × fixing screw M8 DFL424/20

L 90 × W 82 × H 77 mm | 0.548 kg



Handrail connector

corner, left
-17.5° & 0°





DFL 464/N.21

steel


corner, left, with connection -17.5° & 0°, to be used with staircase, with 2 × fixing screw M8 DFL 424-20

L 121.2 × W 111 × H 76.1 mm | 1.122 kg



Handrail connector

corner, right
-17.5° & 0°





DFL 466/N.21

steel

corner, right, with connection -17.5° & 0°, to be used with staircase, with 2 × fixing screw M8 DFL 424-20

L 121.2 × W 111 × H 76.1 mm | 1.126 kg



End plate

for DFL 470
L 76 × W 31 × H 15 mm





DFL 410.21

steel

for handrail extrusion "end piece" DFL 470, with 1 × clamping screw
M4

L 76 × W 31 × H 15 mm | 0.055 kg



Tools

octamax



Hexagon wrench

A/F 7
190 mm long



DFL 590.90

steel
A/F 7
190 mm long | 0.072 kg





Ratchet

7 mm 3/8"
193 mm long



DFL 592.90

plastic/steel
incl. screwdriver bit 7 mm 3/8"
193 mm long | 0.3 kg



Basic modules 3 × 4

octamax

Basic Module

3 × 4, stair left
and extension module 3 × 4




DFL 644L.90

aluminium

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 10138 × H 3936 × D 4186 mm | 346.966 kg



Basic Module

3 × 4, stair right
and extension module 3 × 4




DFL 644R.90

aluminium

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 10138 × H 3936 × D 4186 mm | 346.962 kg



Basic Module

3 × 4, stair left
and extension module 3 × 4




DFL 646L.90

aluminium

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 6166 × H 3936 × D 8158 mm | 348.148 kg



Basic modules 3 × 4

octamax

Basic Module

3 × 4, stair right
and extension module 3 × 4



DFL 646R.90

aluminium

1 × basic module 3 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 6166 × H 3936 × D 8158 mm | 348.144 kg



Basic Module

3 × 4, stair left
and extension modul 4 × 4



DFL 744L.90

aluminium

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 11128 × H 3936 × D 4186 mm | 357.324 kg



Basic Module

3 × 4, stair right
and extension module 4 × 4



DFL 744R.90

aluminium

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 11128 × H 3936 × D 4186 mm | 358.446 kg



Basic modules 3 × 4

octamax

Basic Module

3 × 4, stair left
and extension modul 4 × 4




DFL 747L.90

aluminium

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 8158 mm | 359.632 kg



Basic Module

3 × 4, stair right
and extension module 4 × 4




DFL 747R.90

aluminium

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 8158 mm | 359.628 kg



Basic Module

3 × 4, stair left
and extension modul 4 × 4




DFL 743L.90

aluminium

1 × basic module 3 × 4 and extension module 4 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 8158 mm | 352.945 kg



Basic modules 3 x 4

octamax

Basic Module

3 x 4, stair right
and extension modul 4 x 4




DFL 743R.90

aluminium

1 x basic module 3 x 4 and extension module 4 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 7156 x H 3936 x D 8158 mm | 352.945 kg



Basic Module

3 x 4, staircase landing
and extension module 3 x 4




DFL 644PL.90

aluminium

1 x basic module 3 x 4, including Staircase landing and extension module 3 x 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 6166 x H 3936 x D 5671 mm | 476.102 kg



Basic Module

3 x 4, staircase landing
and extension module 3 x 4




DFL 644PR.90

aluminium

1 x basic module 3 x 4, including Staircase landing and extension module 3 x 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 6166 x H 3936 x D 5671 mm | 476.098 kg



Basic modules 3 × 4

octamax

Basic Module

3 × 4, staircase landing and extension module 3 × 4




DFL 646PL.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 3 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7651 × H 3936 × D 5478 mm | 476.186 kg



Basic Module

3 × 4, staircase landing and extension module 3 × 4




DFL 646PR.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 3 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7651 × H 3936 × D 5478 mm | 476.048 kg



Basic Module

3 × 4, staircase landing and extension module 4 × 4




DFL 744PL.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 5671 mm | 487.586 kg



Basic modules 3 × 4

octamax

Basic Module

3 × 4, staircase landing and extension module 4 × 4




DFL 744PR.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 5671 mm | 487.582 kg



Basic Module

3 × 4, staircase landing and extension module 4 × 4




DFL 744PLM.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 8488 × H 3936 × D 5671 mm | 483.204 kg



Basic Module

3 × 4, staircase landing and extension module 4 × 4




DFL 744PRM.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 8488 × H 3936 × D 5671 mm | 483.2 kg



Basic modules 3 × 4

octamax

Basic Module

3 × 4, staircase landing and extension module 4 × 4




DFL 747PL.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 8641 × H 3936 × D 5478 mm | 487.54 kg



Basic Module

3 × 4, staircase landing and extension module 4 × 4




DFL 747PR.90

aluminium

1 × basic module 3 × 4, including Staircase landing and extension module 4 × 4, railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 8641 × H 3936 × D 5478 mm | 487.536 kg



Basic modules 4 x 4

octamax

Basic Module

4 x 4, stair left
and extension module 3 x 4




DFL 474L.90

aluminium

1 x basic module 4 x 4 and extension module 3 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 11128 x H 3936 x D 4186 mm | 358.449 kg



Basic Module

4 x 4, stair right
and extension modul 3 x 4




DFL 474R.90

aluminium

1 x basic module 4 x 4 and extension module 3 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 11128 x H 3936 x D 4186 mm | 358.445 kg



Basic Module

4 x 4, stair left
and extension module 3 x 4




DFL 477L.90

aluminium

1 x basic module 4 x 4 and extension module 3 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 7156 x H 3936 x D 8158 mm | 358.449 kg



Basic modules 4 × 4

octamax

Basic Module

4 × 4, stair right
and extension module 3 × 4




DFL 477R.90

aluminium

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 8158 mm | 358.445 kg



Basic Module

4 × 4, stair left
and extension module 3 × 4




DFL 474LM.90

aluminium

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 8158 mm | 352.945 kg



Basic Module

4 × 4, stair right
and extension module 3 × 4



DFL 474RM.90

aluminium

1 × basic module 4 × 4 and extension module 3 × 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 × step DFL 532, not included: walkable floor disc (2 × 19 mm) and parapet infills

W 7156 × H 3936 × D 8158 mm | 352.945 kg



Basic modules 4 x 4

octamax

Basic Module

4 x 4
stair right




DFL 444R.90

aluminium

1 x basic module 4 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 8158 x H 3936 x D 4186 mm | 296.693 kg



Basic Module

4 x 4, stair left
and extension modul 4 x 4




DFL 844L.90

aluminium

1 x basic module 4 x 4 and extension module 4 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° left, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 4186 x H 3936 x D 12118 mm | 369.933 kg



Basic Module

4 x 4, stair right
and extension module 4 x 4




DFL 844R.90

aluminium

1 x basic module 4 x 4 and extension module 4 x 4, including railing supports for parapet height of 1150 mm, single flight of stairs 35° right, 14 x step DFL 532, not included: walkable floor disc (2 x 19 mm) and parapet infills

W 4186 x H 3936 x D 12118 mm | 369.929 kg



➤ M-DFL-1.0	39
Assembly instruction doubleform	
➤ TI-DFL-1.0	49
octamax Planning bases "Standard Measurements"	
➤ TI-DFL-1.1	50
octamax Planning Bases "Standard Measurements"	
➤ TI-DFL-1.2	51
octamax Planning Bases "Standard Measurements"	
➤ TI-DFL-1.3	52
octamax Planning Bases "Standard Measurements"	
➤ TI-DFL-1.7	53
octamax - Planning Bases "Standard measurements"	
➤ TI-DFL-3.0	54
octamax - Construction bases	
➤ TI-DFL-3.1	55
octamax - Construction bases	
➤ TI-DFL-3.2	56
octamax - Examples for covering of wall and supporting beam	
➤ TI-DFL-3.3	57
octamax - Example of stair covers	
➤ TI-DFL-3.4	58
octamax -Example of top beam covers	

➤ technical information


➤ TI-DFL-5.0	59
octamax Planning criteria "Base plates"	
➤ TI-DFL-5.1	60
octamax Planning criteria "Base plates"	
➤ TI-DFL-6.0	61
octamax Planning criteria "vertical glazing" , Glass 13,5 mm	
➤ TI-DFL-6.1	62
octamax Planning criteria "vertical glazing", Glass 13,5 mm	
➤ TI-DFL-6.2	63
octamax Mounting dimension for glas hinge M 1492	




1



2

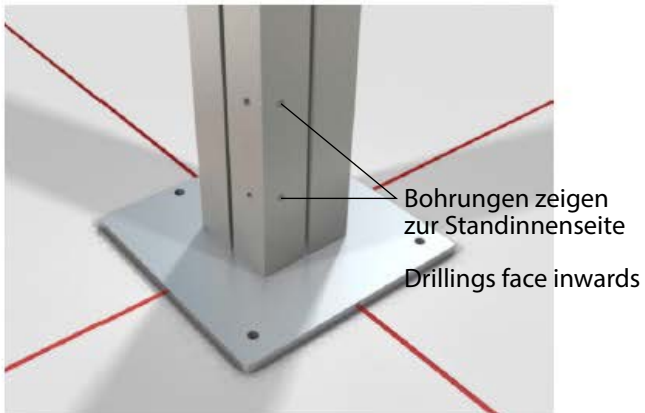


3

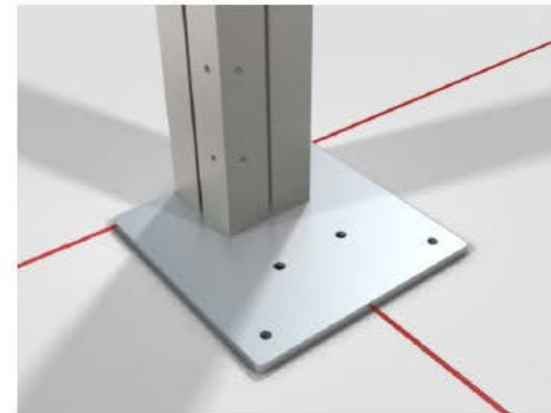

4

M-DFL-1.0

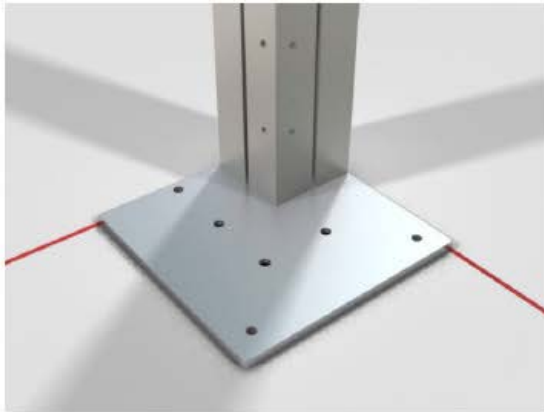

5



6



7




8

M-DFL-1.0




9

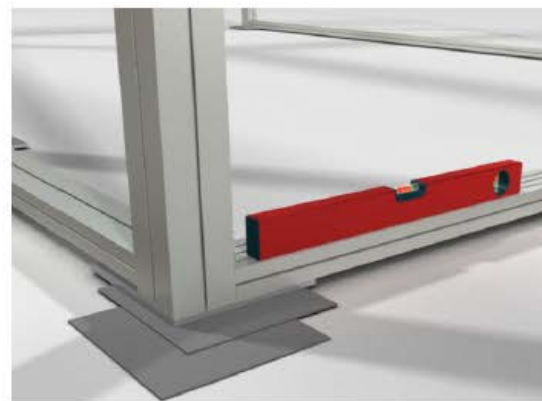

10



11

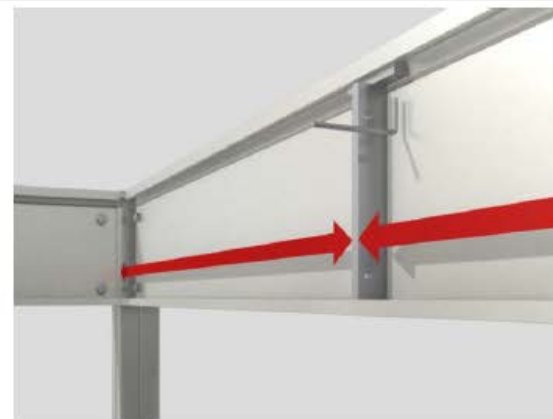

12

M-DFL-1.0

13



14



15




16



M-DFL-1.0




17

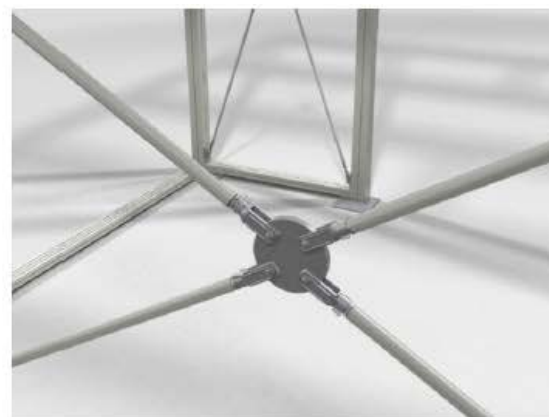

18




19

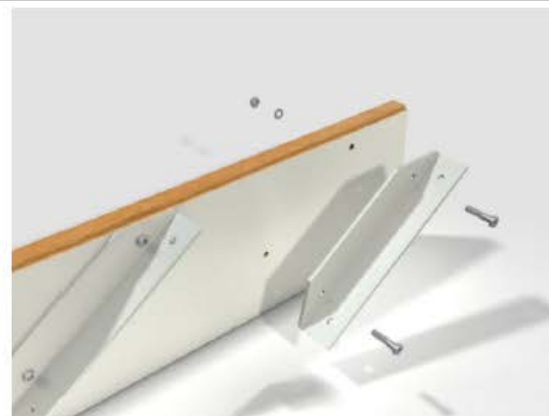


20

M-DFL-1.0

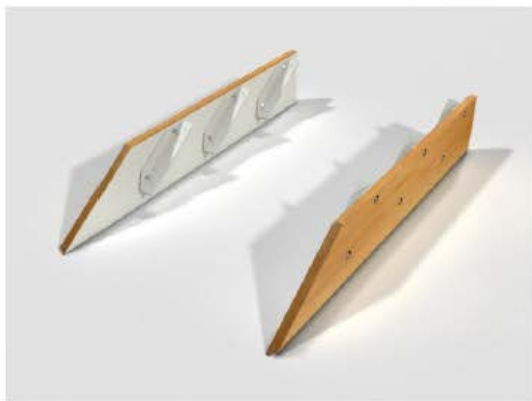

21

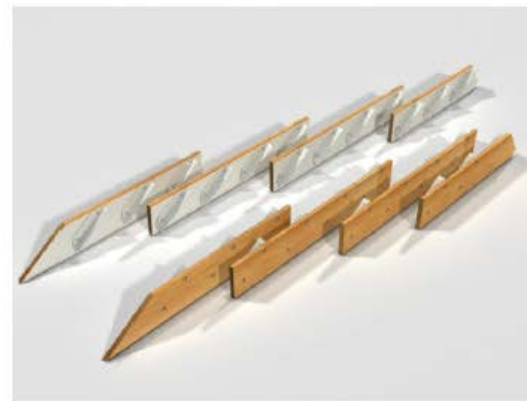

22



23



24

M-DFL-1.0




25



26




27

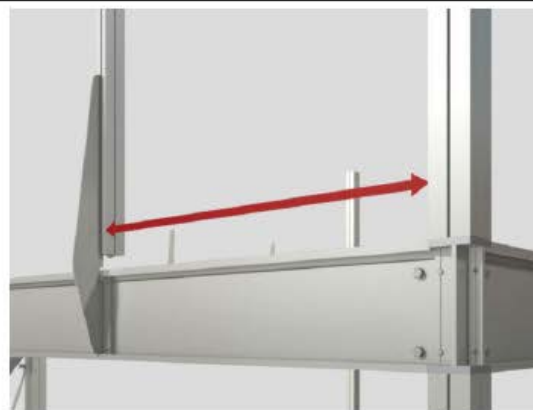

28

M-DFL-1.0

29

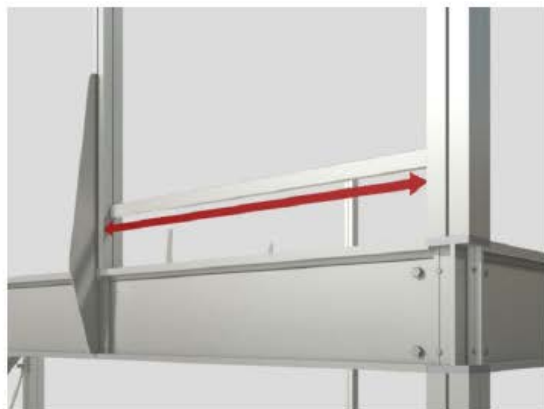


30



31




32

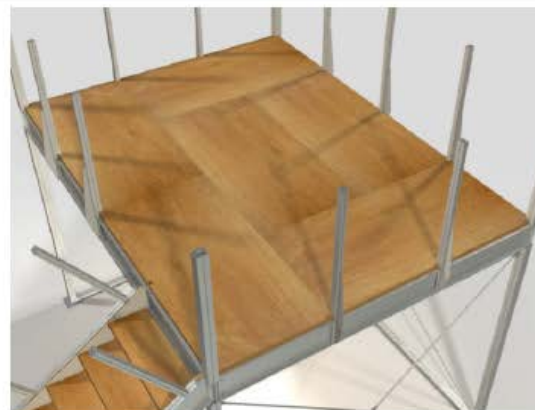

M-DFL-1.0



33

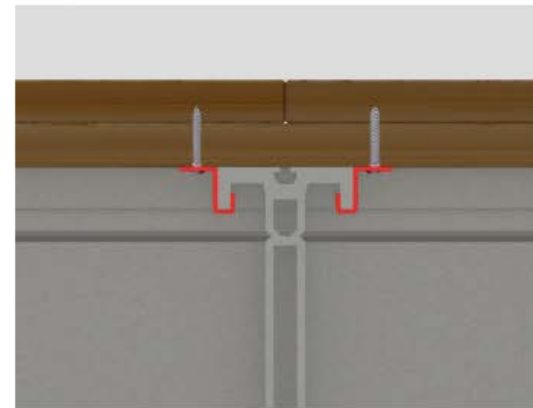

34



35



36

M-DFL-1.0



37



38





39




40

M-DFL-1.0


connector head DFL 100

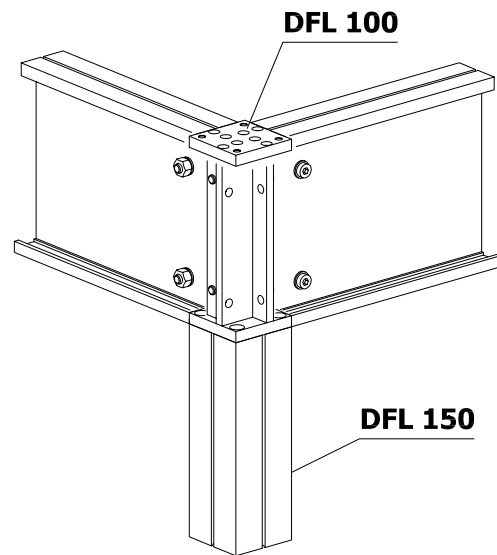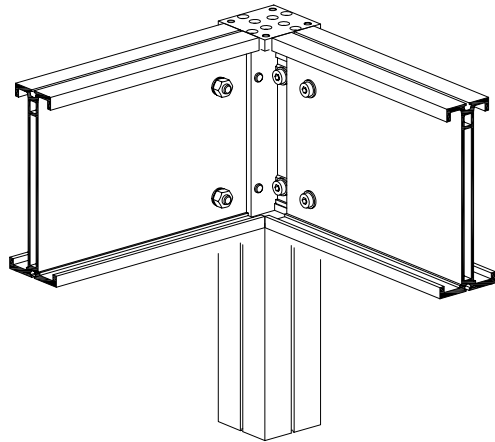




Mounting of intermediate beams "swivel in"

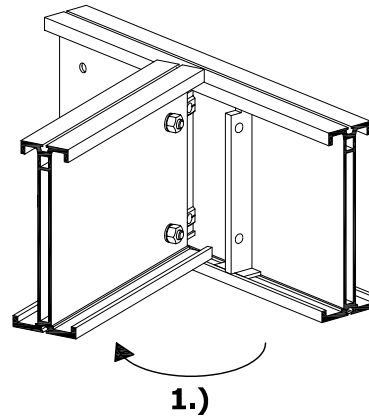

2.)

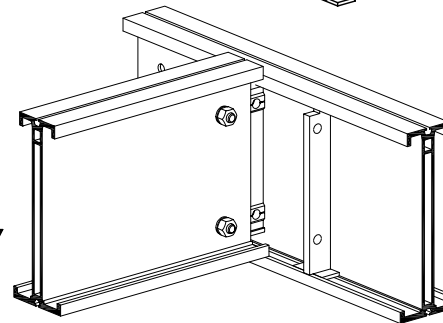


3.)

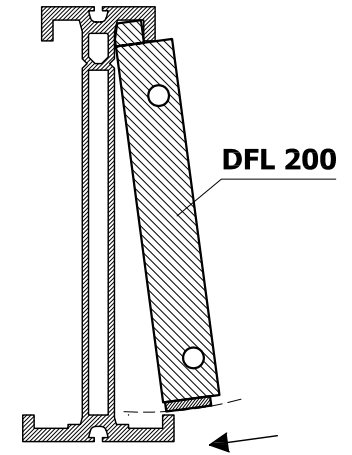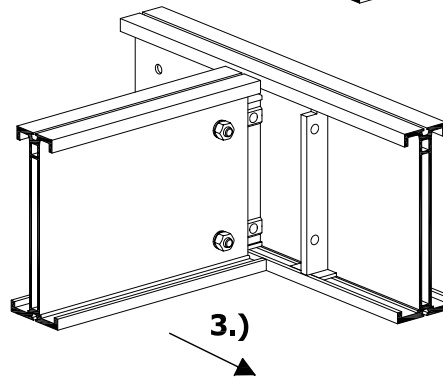



Stair stringers DFL 502 "mounting examples"


Hook in to beam

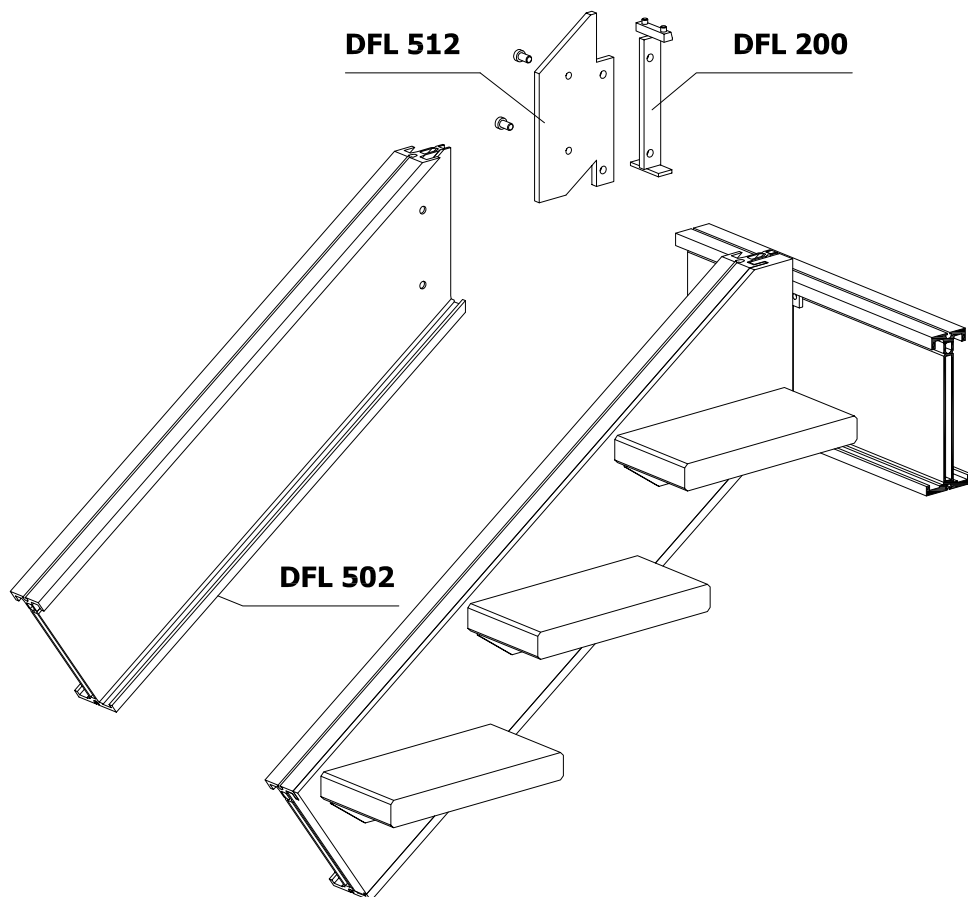




Hook in to connector head

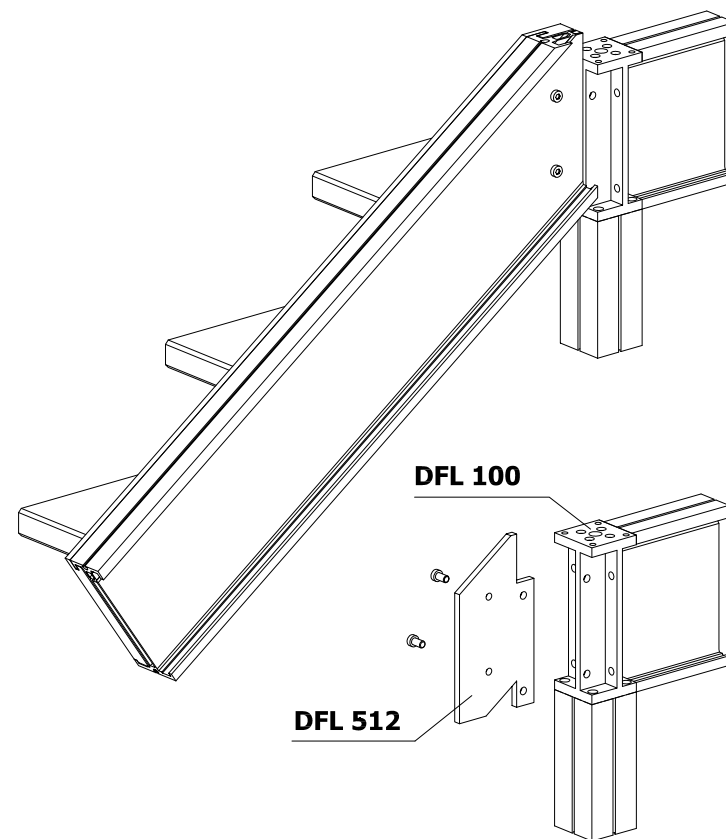

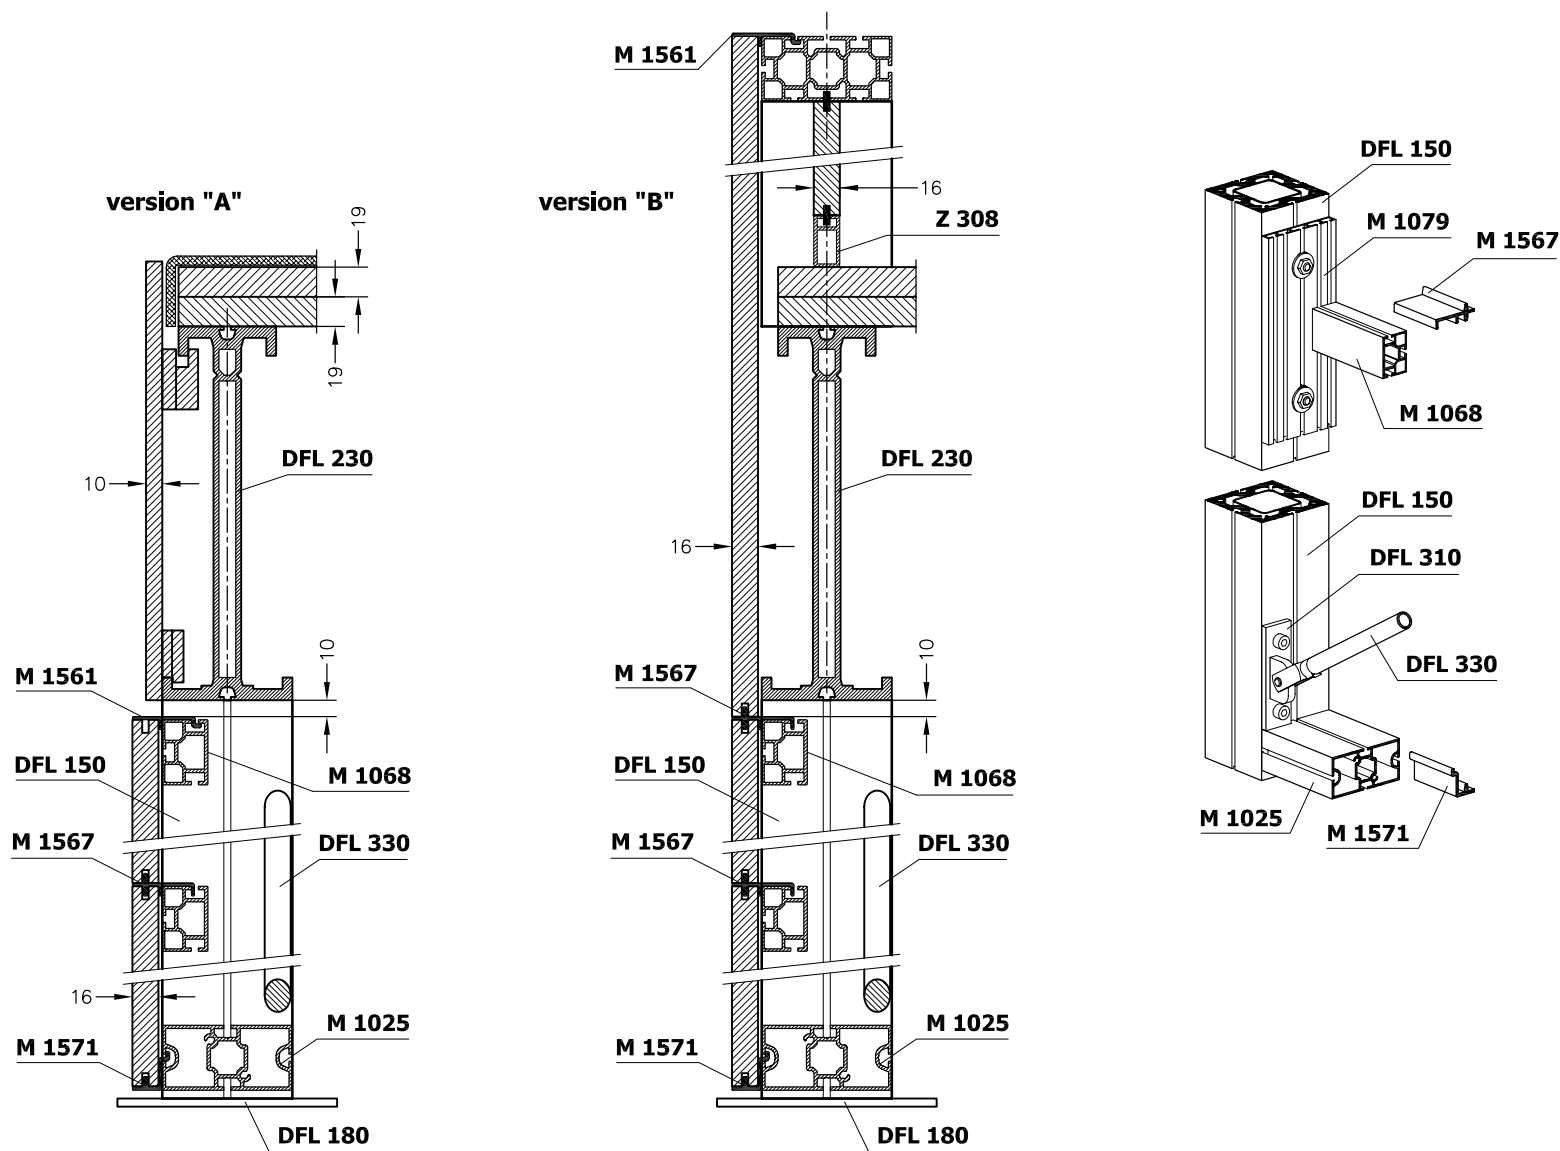


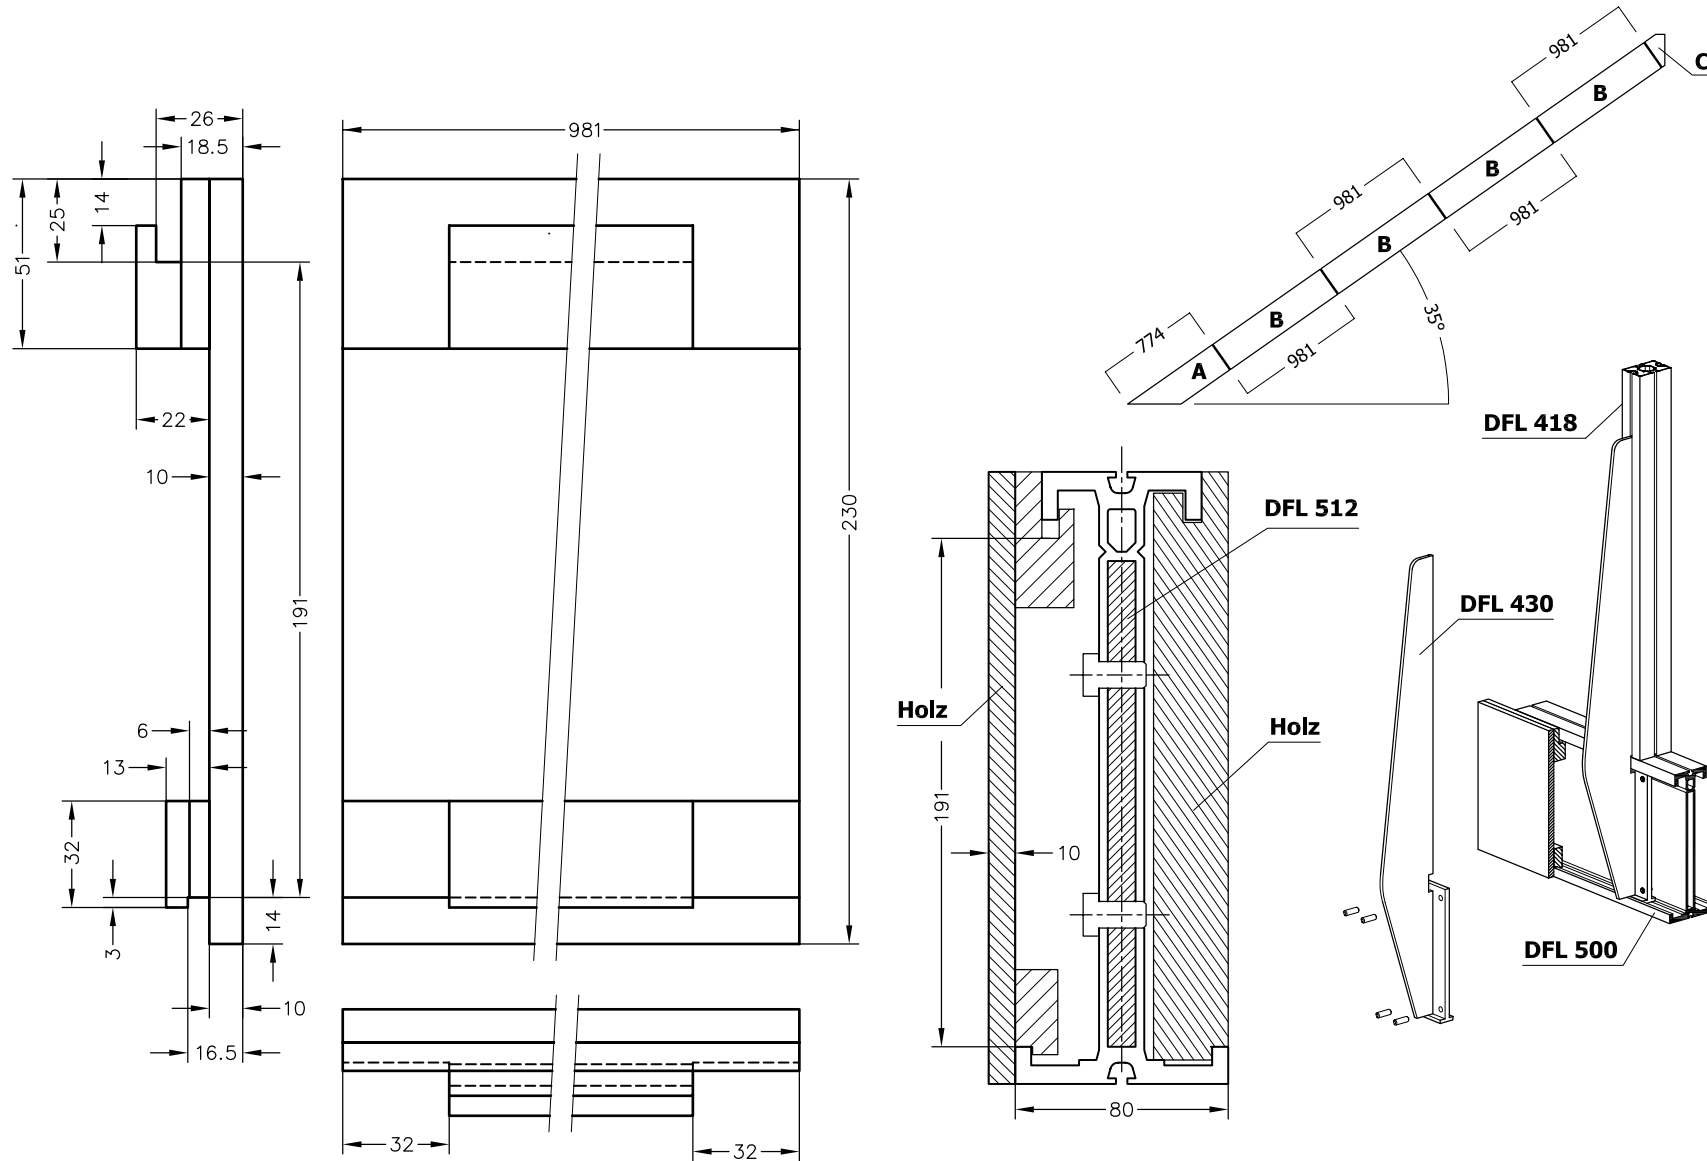

TI-DFL-3.3 EW 3287.04 - 08.04.09/WG, geä. 16.11.09/HB, geä. 11.12.09/WG - 10/2010 shift

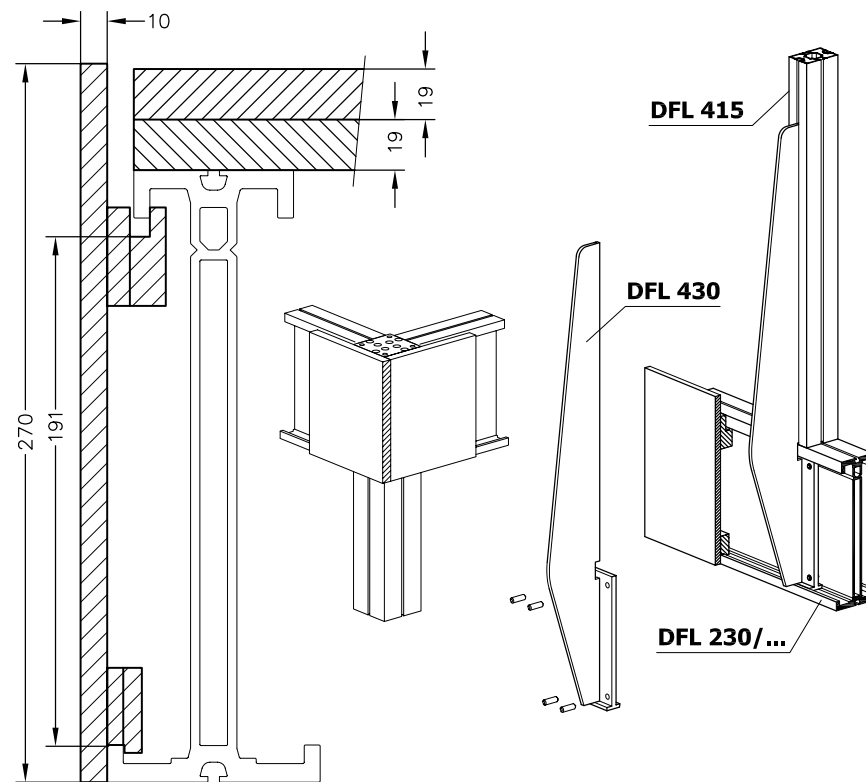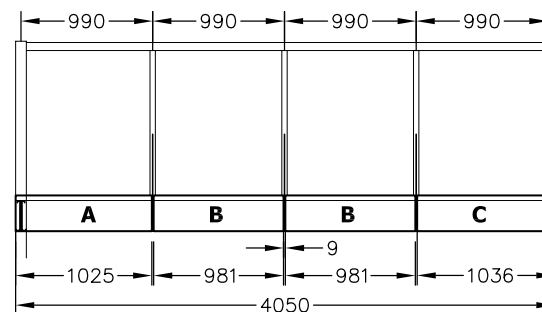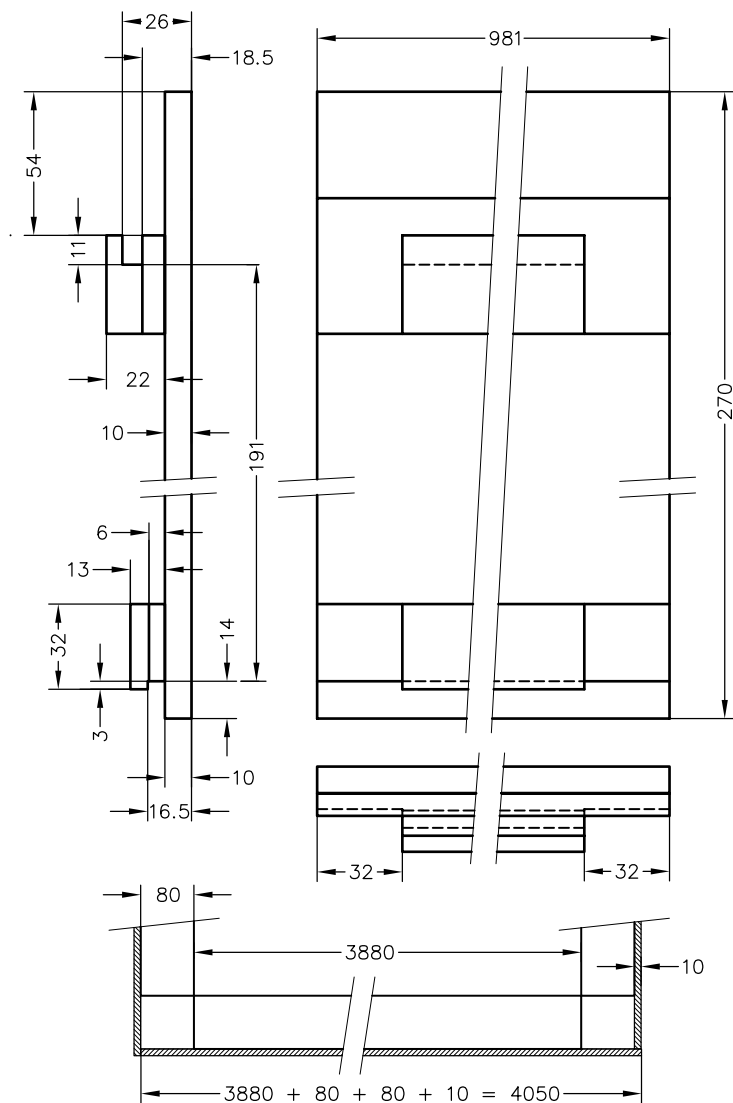


2 x 19mm chipboard panel

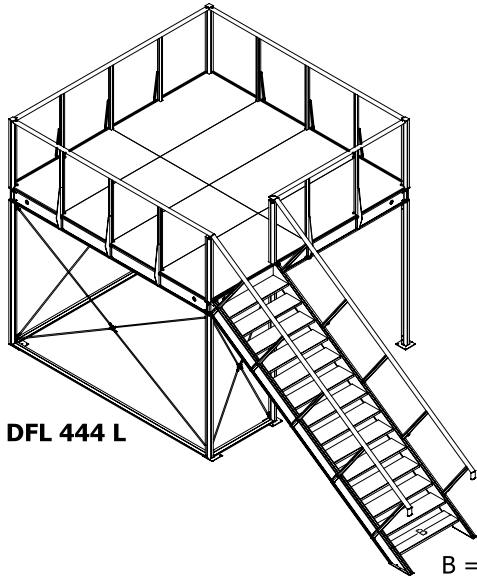


DFL 444 L

chipboard layer 1 (bottom)




parts list		DFL 444 L
quantity	description	
3	A	
3	B	
1	S4	
1	S5	






chipboard layer 2 (top)



parts list		DFL 444 L
quantity	description	
3	A	
4	B	
1	S6	

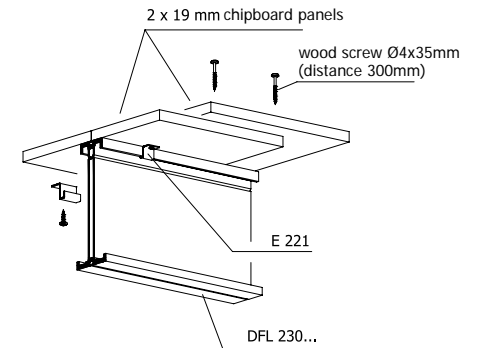


B = 1200mm step width

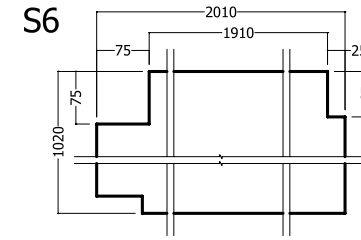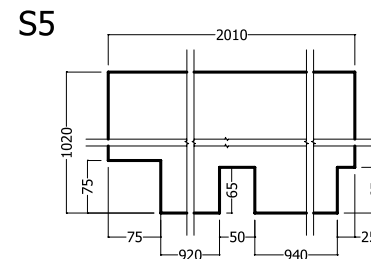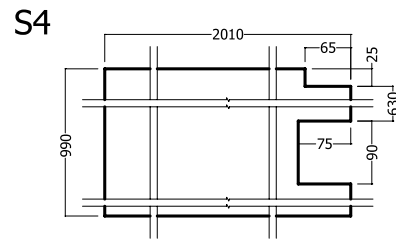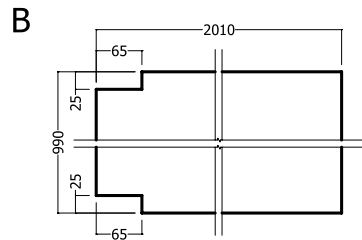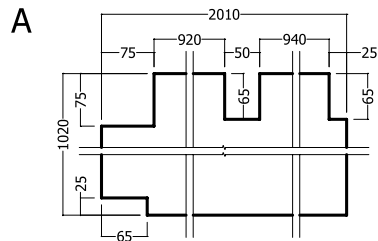


Important:

The base plates (in two layers) assume the function of a rigid ceiling plate. Mounting is done with floor hooks E221 that establish the connection between plate and beam! These are fastened with wood screws. This is the only way to transfer the horizontal forces via the E221 floor hooks on the beams.

Note: a distance of approx. 200 mm between the floor hooks E221 in the edge area must be observed!

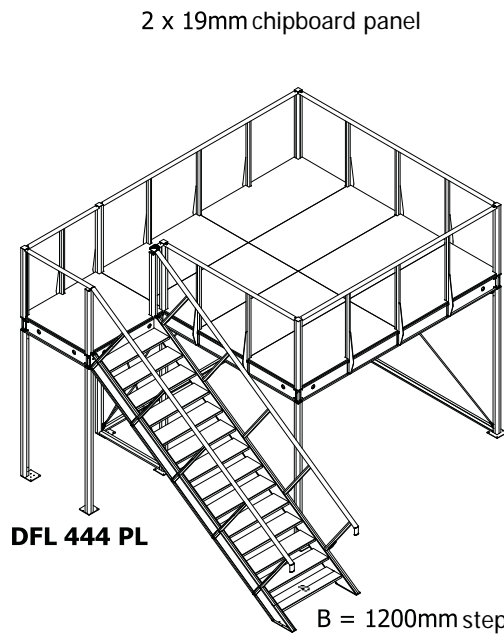


chipboard layer 1 (bottom)







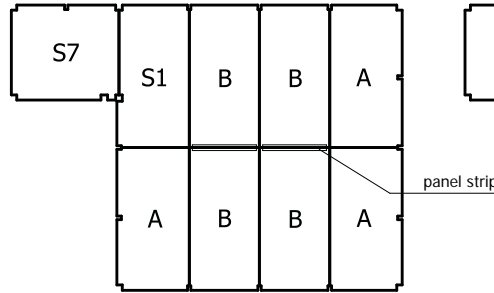


parts list DFL 444 PL	
quantity	description
3	A
4	B
1	S1
1	S7
2	Z

chipboard layer 2 (top)

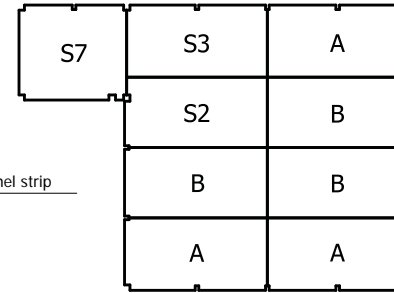

parts list DFL 444 PL	
quantity	description
3	A
3	B
1	S2
1	S3
1	S7

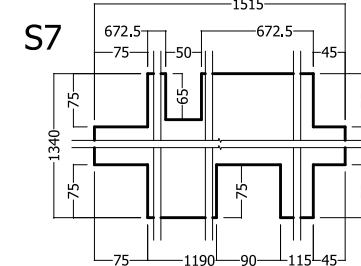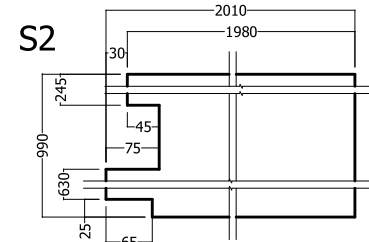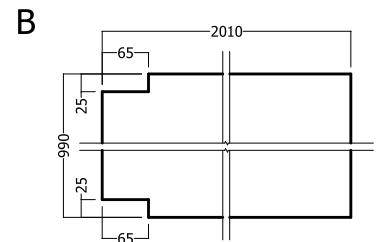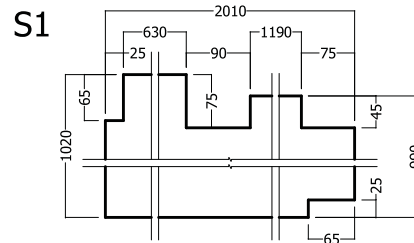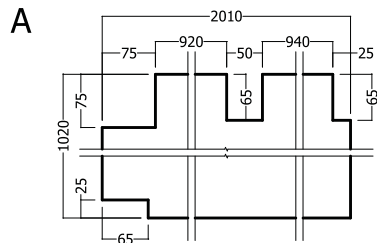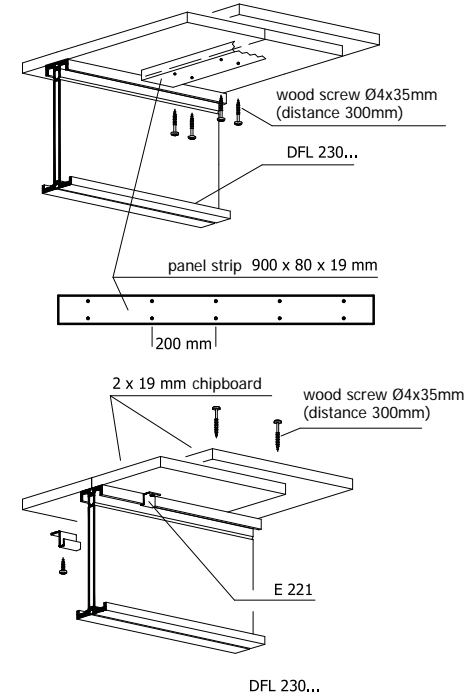


Important:


The base plates (in two layers) assume the function of a rigid ceiling plate. Mounting is done with floor hooks E221 that establish the connection between plate and beam! These are fastened with wood screws. This is the only way to transfer the horizontal forces via the E221 floor hooks on the beams.

Note: a distance of approx. 200 mm between the floor hooks E221 in the edge area must be observed!

Vertical glazing, anti-fall guard

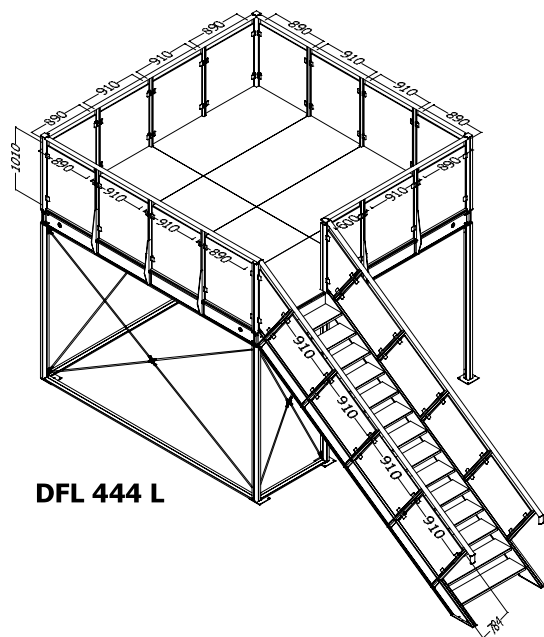

DFL 444 L




parts list DFL 444 L				
quantity	article N°	description	length	width
7		A	890 mm	1010 mm
7		B	910 mm	1010 mm
1		C	600 mm	1010 mm
8		S1	910 mm	784 mm
2		S2	680 mm	784 mm
100	M 1492	glass holder*		



*for panel thickness 13,5mm

Note:


The indicated glass panel size considers an air gap of 3 mm left and right!

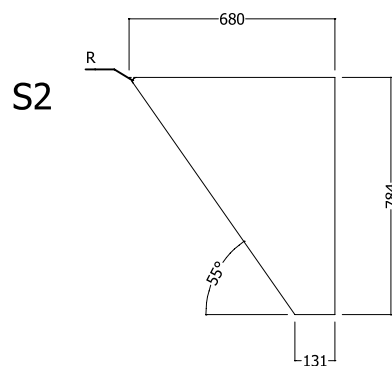



S2

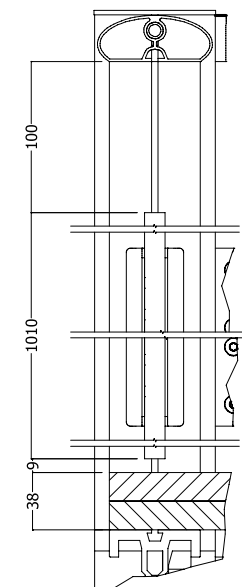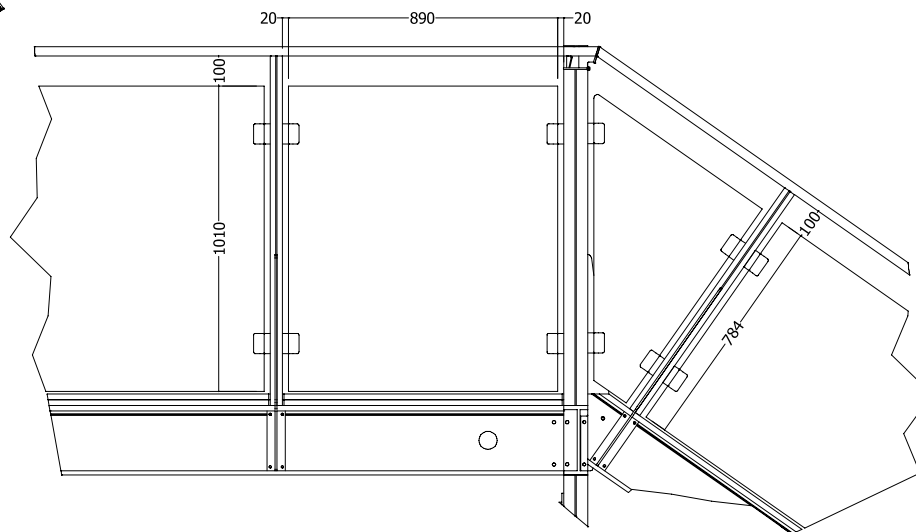

Vertical glazing, anti-fall guard

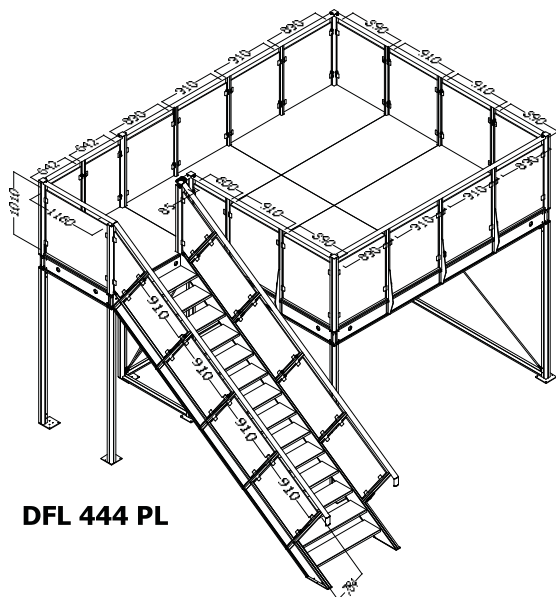



DFL 444 PL





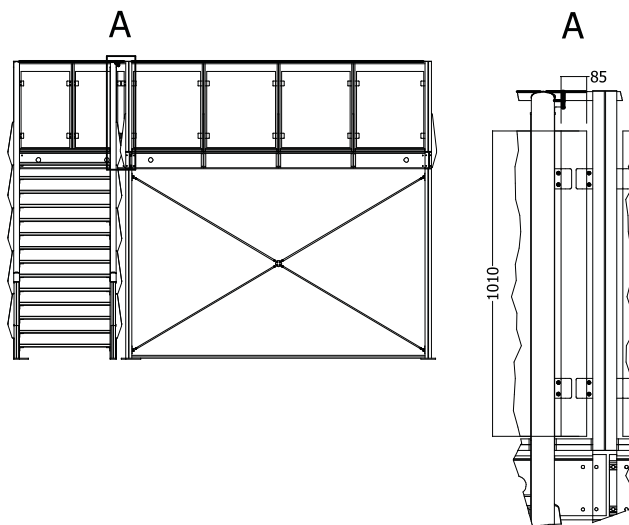
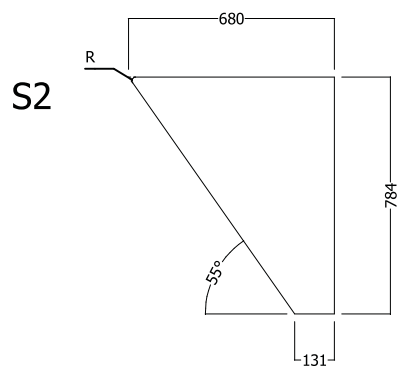


parts list DFL 444 PL				
quantity	article N°	description	length	width
7		A	890 mm	1010 mm
7		B	910 mm	1010 mm
1		C	600 mm	1010 mm
2		D	642 mm	1010 mm
1		E	1160 mm	1010 mm
1		F	85 mm	1010 mm
8		S1	910 mm	784 mm
2		S2	680 mm	784 mm
116	M 1492	glass holder*		

*for panel thickness 13,5mm

Note:
The indicated glass panel size considers an air gap of 3 mm left and right!

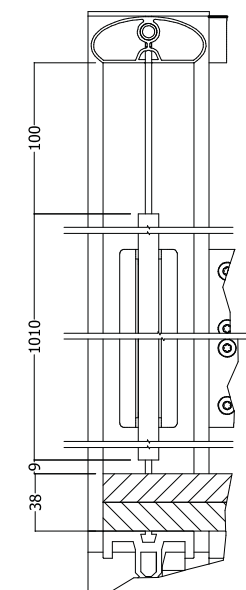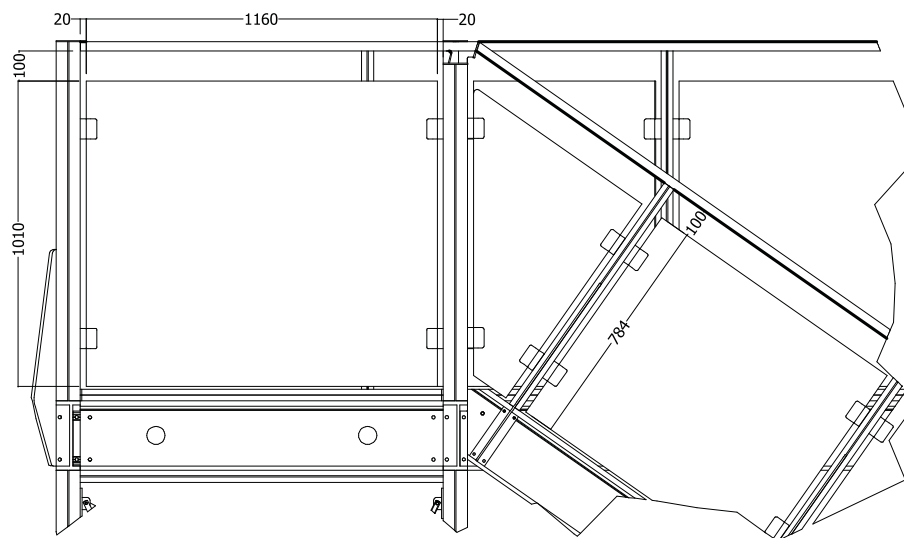

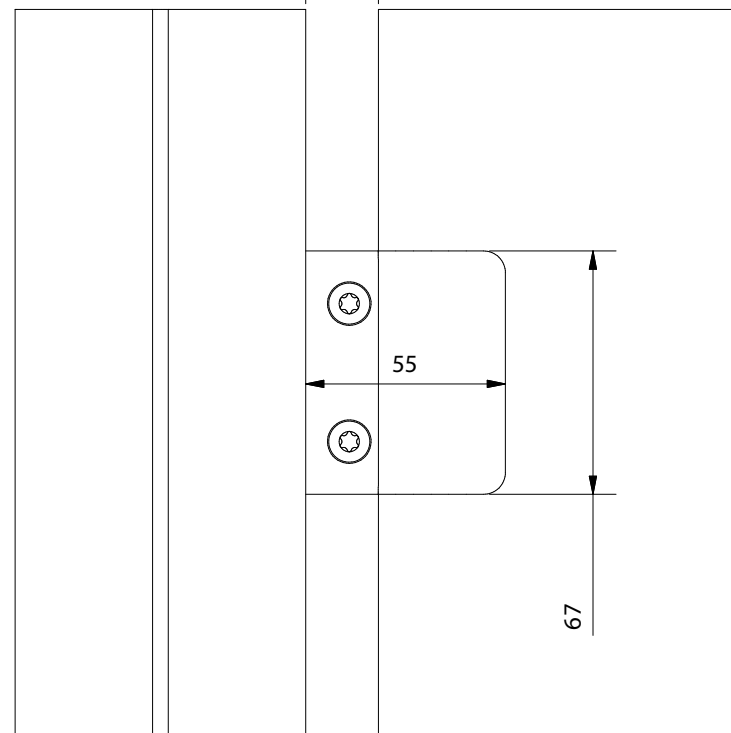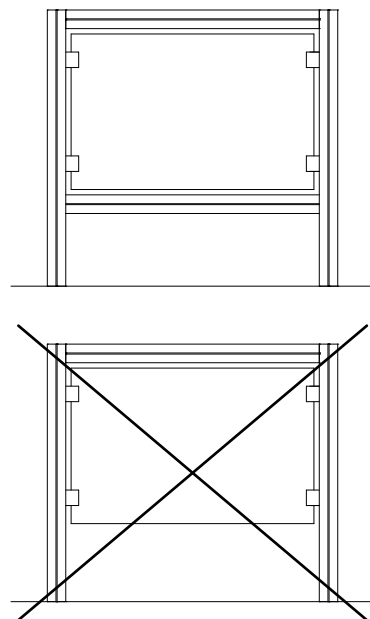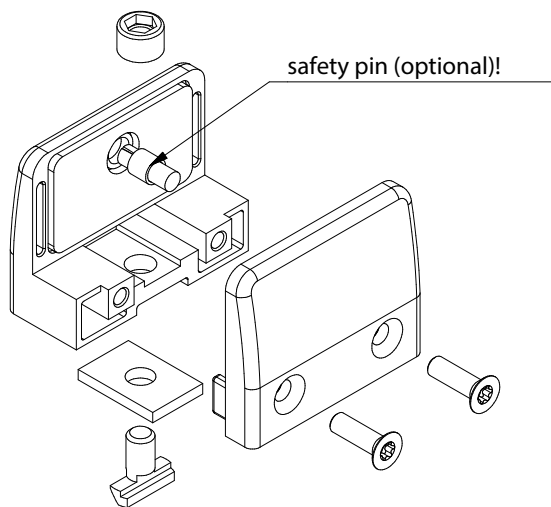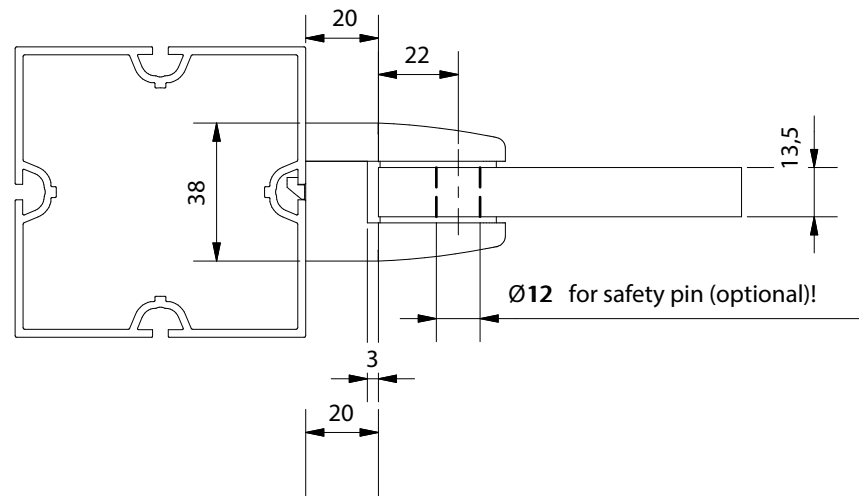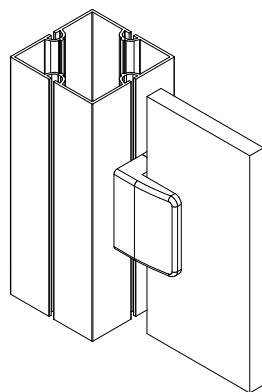



OCTANORM®-Vertriebs-GmbH

für Bauelemente
Raiffeisenstraße 39
70794 Filderstadt, Germany
T +49 711 77003 0
E info@octanorm.de

Adria

↗ octanormadria.com

Australia

↗ octanorm.com.au

Belgium

↗ octanorm.be

China

↗ octanorm.cn

Emirates

↗ octanormemirates.net

Espana

↗ octanorm.es

France

↗ octanorm.fr

Hellas

↗ octanorm.gr

Italia

↗ octanorm.com

Japan

↗ octanorm.co.jp

México

↗ octanorm.com.mx

Nigeria

↗ it-al.design

Nordic

↗ octanorm.se

North America

↗ octanormna.com

Polska

↗ octanorm.pl

South Africa

↗ octanorm.co.za

UK

↗ octanorm.uk

↗ octanorm.com