


octawall 40

classic/toolless

The light weight system.



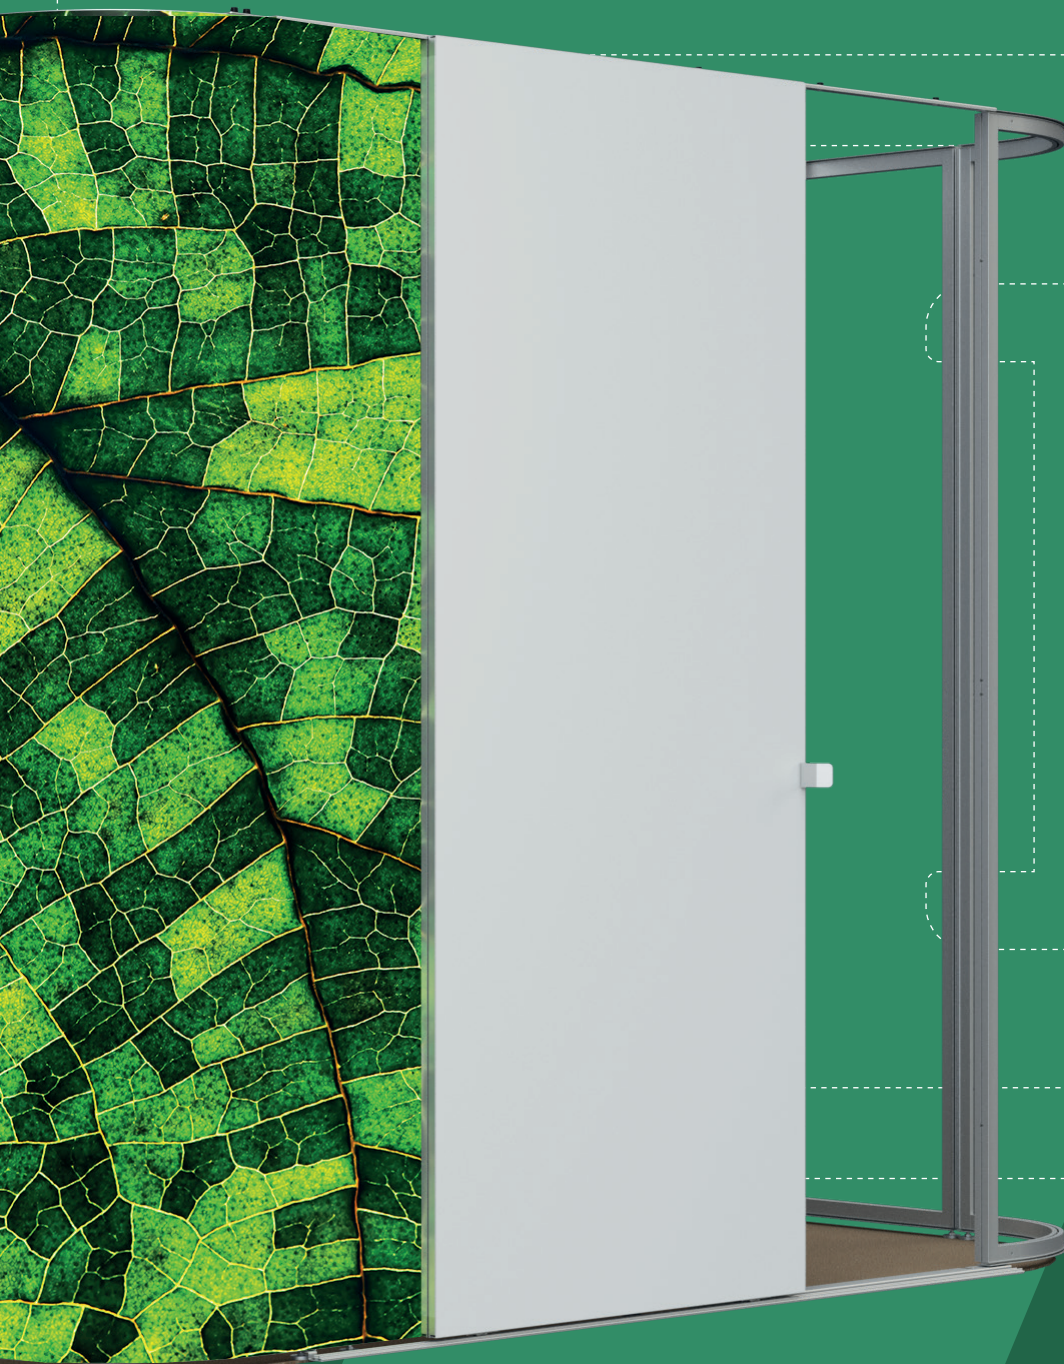

diversity.



Lianas. Birds of Paradise. Centipedes. The tropical rainforest is home to more than 30 million animal and plant species. Living together in perfect harmony and finely adapted to the conditions. 12 hours of sunlight every day. Rainfall in all seasons. Multistorey construction. From soil to crown, no matter the layer, each organism is developed for a particular task. Provide shade. Store water. Absorb CO₂. Dead plants are immediately transformed into nutrients and recombined into something new. This is the only way to create such an immense variety of species. So the question is not whether to take advantage of the versatility or not. But: How do we need to create the basic components of a system to achieve maximum diversity? Here are some inspiring answers.



**stay
flex
ible.**


➤ octawall 40 classic	06
➤ Technical Features	08
➤ Components	14
➤ octawall 40 toolless	18
➤ Technical Features	20
➤ Components	22
➤ In Action	24




adaptable. elaborate. unique.

A system that fits everywhere - in every detail.

Too many individual parts? Too complicated? Not so with **octawall 40 classic**. Reduced to the most important components, the system offers refreshing simplicity. Simple, elaborate and therefore unique. From design to assembly. A single door for DIN right and left and can be opened both to the inside and the outside. The T-connector allows you to install ceilings and perpendicular walls even at a later date. These and many other intelligent innovations will help facilitate your trade show routine. **octawall 40 classic** is your guide through the world of exhibition.

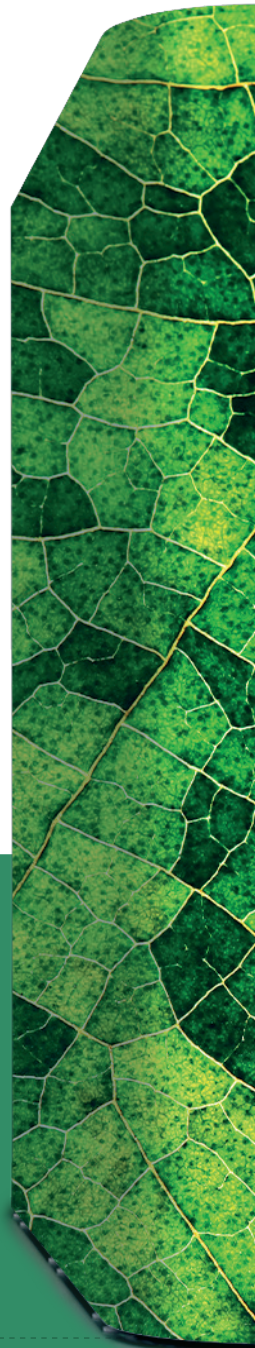


➤ **octawall 40 classic**

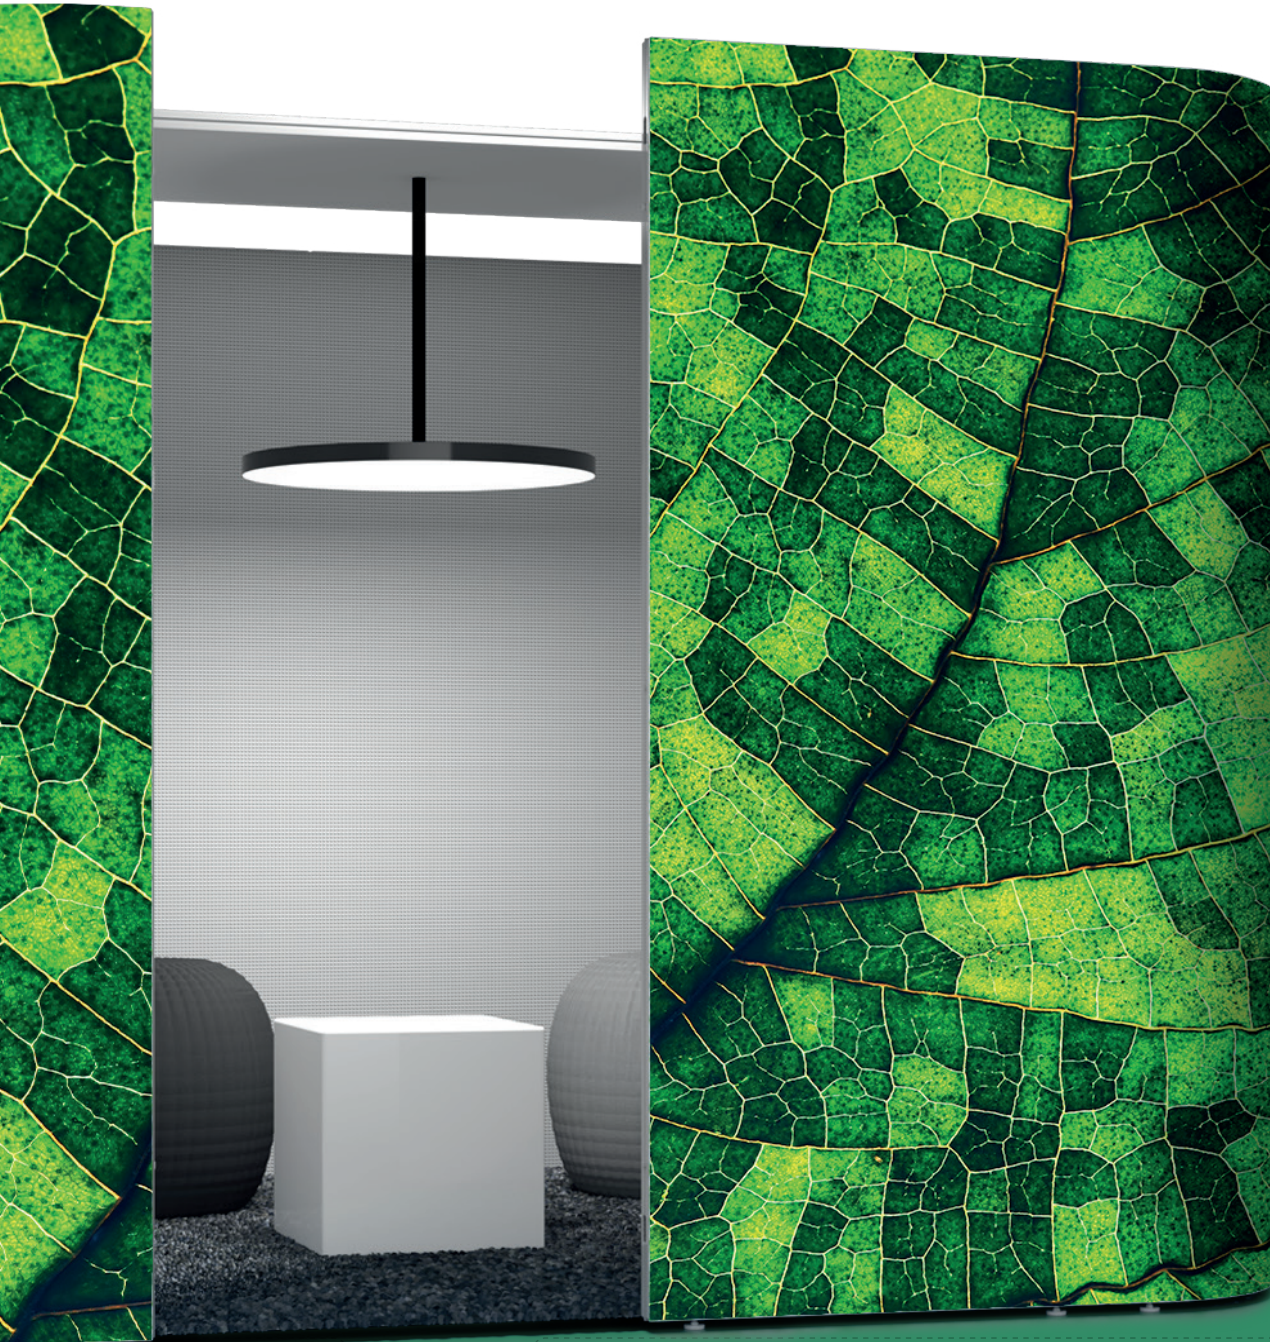



octawall 40 classic

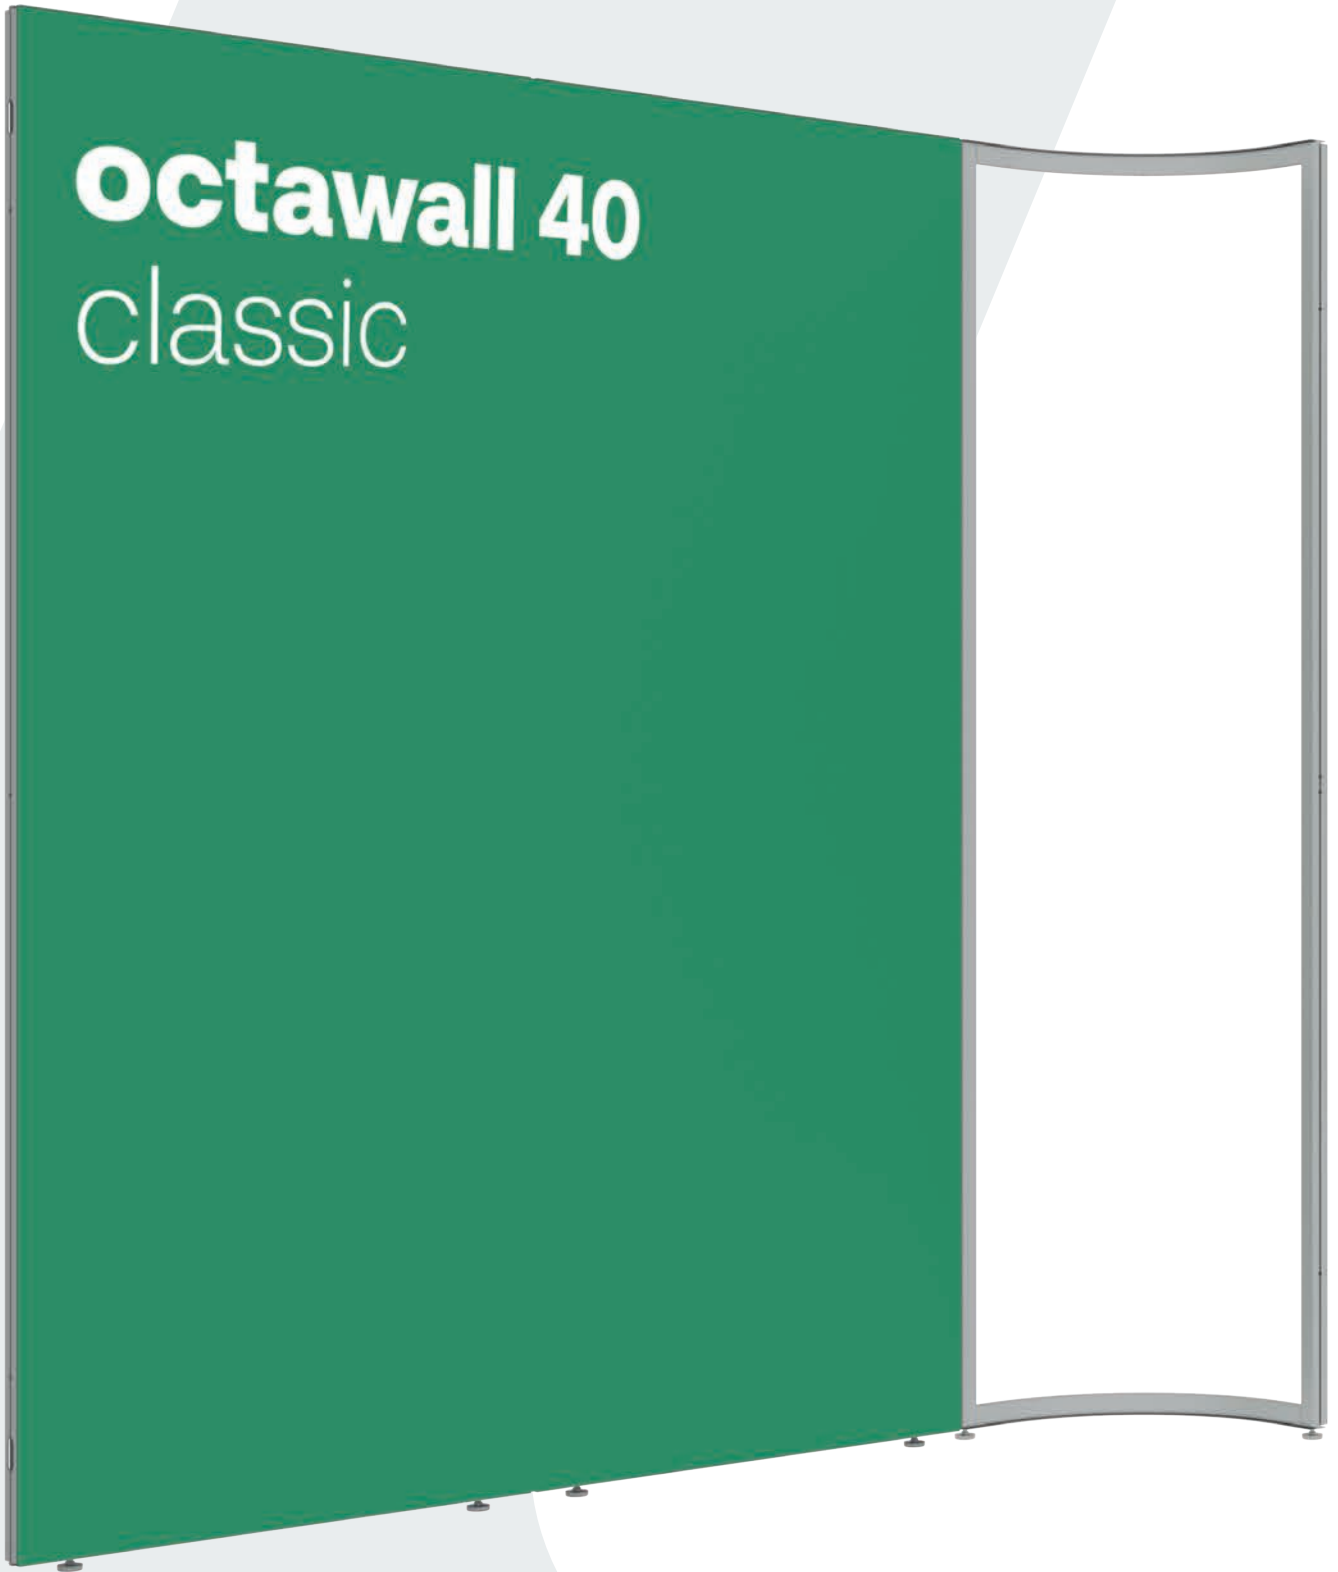

Technical Features

octawall 40 classic




lightweight




fabric + panel
W 906



fabric + fabric
M 1307




toolless quick
connector



curved walls



magnetic holder



T-connector for
ceiling/walls



silicone edge
graphics



almost seamless
fabric corner

Flexible. Without interruption.

Thanks to the S 382 corner extrusion, there is no visible corner upright. The straight corner and minimalistic design allow for around-the-corner graphics, offering maximum advertising space.

Curved walls for more freedom.

Curved frames with panel and all-round graphics – totally seamless. This creates maximum advertising space uninterrupted by extrusions. Rooms will appear in a completely new light. Not only from the outside, but also from the inside. **octawall 40 classic** can be equipped with acoustic fabric. No matter if used as a conference room or a place of retreat – with this system, the choice is yours.

Short-term modifications? No problem.

If you forgot something during the planning phase or have to make changes onsite: The W 466 T-connector allows you to install and shift perpendicular walls without the need of a connection extrusion. This way, your booth can easily be adapted to local conditions despite its system construction. Apart from walls, complete ceiling elements can be installed.

1 beam. 2 magnets. An invisible connection.

Literature racks and shelves can be attached without visible fixtures: magnetically to a beam mounted between uprights behind the fabric. Allowing you to display up to 2 kg at any height – no tools required.

Time-saving assembly.

The frames can be easily connected to each other without the use of tools for quick assembly and disassembly. The specially designed quick connectors provide a secure hold and eliminate the need for small parts that are easy to lose.



Space for large-scale advertising messages.

The frames can be covered with panels or fabrics. Panels are held in place securely with hook-and-loop tape, while fabrics are clamped into the grooves with silicone edges. Simple and always new, depending on the product and season.



Quick connectors for efficient assembly and disassembly.

Frame to frame.


The quick connectors are tightened by hand and ensure a stable connection between the individual frames – no tools required.

➤ Technical Features

octawall 40 classic

One door for every need: W 405

The W 405 universal door can be used as both a left-hand and right-hand door. It can be integrated flush with the wall and fits perfectly into the overall design

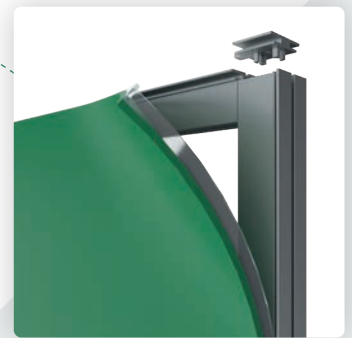

Continuation of the groove with end cap for attaching fabric graphics across frames.



Corner insert with threaded hole for adjustable foot.




Product in focus.

Our magnetic retainers can be flexibly moved within the frame and easily adjusted in height and width. Once in position, they disappear invisibly behind the fabric graphic. The fabric quickly clamps into place via the groove and can be effortlessly replaced at any time. Perfect for changing product presentations.



➤ Technical Features


octawall 40 classic

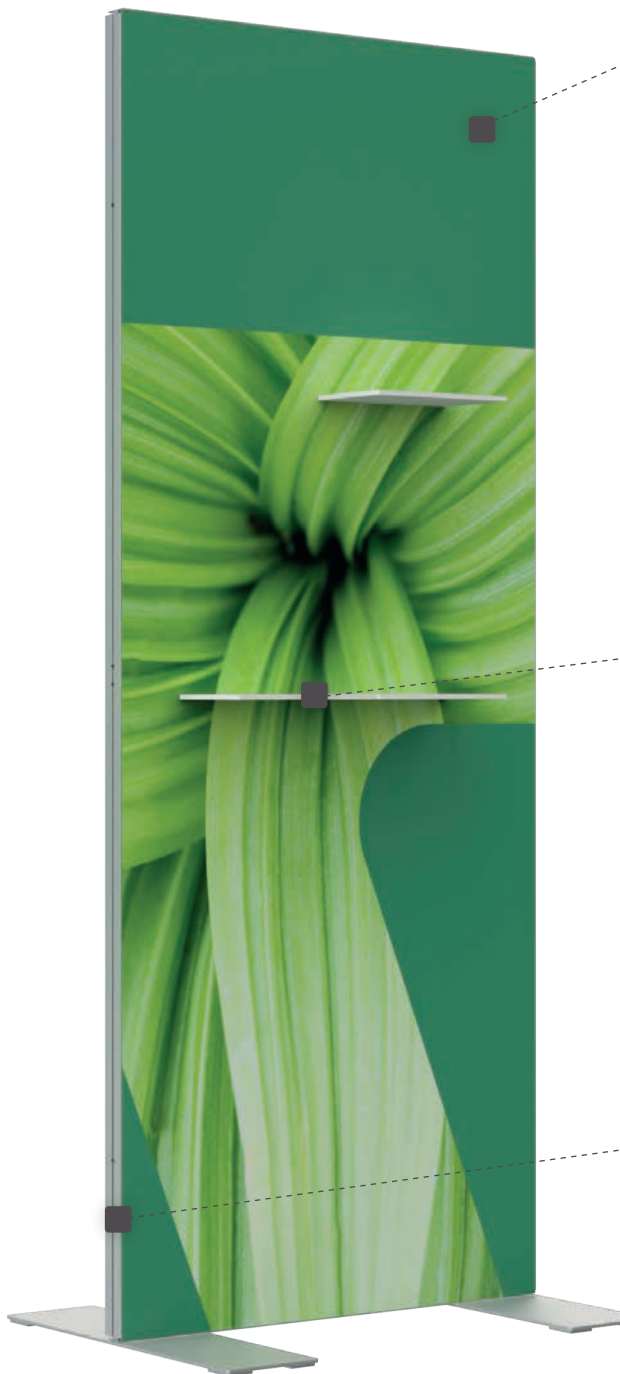

Tool for easy removal of magnetic retainer.



Various accessories.



Thanks to the silicone edge, fabric graphics can be changed easily.



octawall 40 classic: frames

elegant aluminium surface / with system groove / extremely lightweight / for single- or double-sided fabric or fabric/panel / for silicone edge graphics

Frame 990 × 2480 mm




W 440/S.01

Aluminium | 1 × frame of W 906 for double sided fabric/panel, incl. 4 × corner inlay W 916/S, 4 × tension lock Z 961/8, **optional:** 2 × adjustable foot S 140/F, 3 × mounting set frame-upright M 1477, 3 × quick connector frame-frame WP 80-1, hook tape W 840

7.67 kg | W 990 × H 2480 × D 40 mm

Without fabric/print
Drillings for cable management available on request



Frame 950 × 2480 mm




W 442/S.01

Aluminium | 1 × frame of W 906 for double sided fabric/panel, incl. 4 × corner inlay W 916/S, 4 × tension lock Z 961/8, **optional:** 2 × adjustable foot S 140/F, 3 × mounting set frame-upright M 1477, 3 × quick connector frame-frame WP 80-1, hook tape W 840

7.59 kg | W 950 × H 2480 × D 40 mm

Without fabric/print
Drillings for cable management available on request



Frame 950 × 2480 mm




W 932.01

Aluminium | 1 × frame of M 1307 for double sided fabric, dividable in the centre, incl. with 4 × corner connector Z 990, with drillings for M 1951 and M 1953, **optional:** 2 × C 440/F adjustable foot and 4 × mounting-set M 1477

8.08 kg | W 950 × H 2480 × D 40 mm

Without fabric/print
Drillings for cable management available on request




Frame 455 × 2480 mm



W 449/S.01

Aluminium | 1 × frame of W 906 for double sided fabric/panel, incl. 4 × corner inlay W 916/S, 4 × tension lock Z 961/8, **optional:** 2 × adjustable foot S 140/F, 3 × mounting set frame-upright M 1477, 3 × quick connector frame-frame WP 80-1, hook tape W 840
6.55 kg | W 455 × H 2480 × D 40 mm

Without fabric/print
Drillings for cable management available on request



Components

octawall 40 classic



Frame custom size




W 444/S.01

Aluminium | 1 × frame of W 906 for double sided fabric/panel, incl. 4 × corner inlay W 916/S, 4 × tension lock Z 961/8, **optional:** 2 × adjustable foot S 140/F, 3 × mounting set frame-upright M 1477, 3 × quick connector frame-frame WP 80-1, hook tape W 840 6.83 kg | W 455 × H 2480 × D 40 mm

W X × H Y × D 40 mm

Without fabric/print
Drillings for cable management available on request



Frame curved 515 × 2480 mm




W 441/S.01

Aluminium | 1 × frame of W 906 for double sided fabric/panel, incl. 4 × corner inlay W 916/S, 4 × tension lock Z 961/8, **optional:** 2 × adjustable foot S 140/F, 3 × mounting set frame-upright M 1477, 3 × quick connector frame-frame WP 80-1, hook tape W 840 6.83 kg | W 455 × H 2480 × D 40 mm

7.33 kg | W 515 × H 2480 × D 515 mm

Without fabric/print
Drillings for cable management available on request



i extrusions have a straight run-out of 115 mm

! When combining several curved frames, deviations may occur at the joints.



octawall 40 classic: accessories

elegant aluminium surface / with system groove / extremely lightweight / for single- or double-sided fabric or fabric/panel / for silicone edge graphics


Door element universal



W 405-Set.01

Aluminium/Steel | 1 × door element made of M 2110/W 906, for fabric/panel on both sides, universal for DIN left and DIN right, opening inwards or outwards, door leaf flush with door leaf frame on the outside or inside, consisting of door leaf frame, outer door frame and door mounting sets, with lock cylinder W 514, without hook tape W 840

outer frame dimension door leaf: 908 × 2442 mm
B 950 × W 2500 × D 40 mm
Without fabric/print



Attention:
Use only
silicone edge
12 × 3 mm!


Door element universal



W 425-Set.01

Aluminium/Steel | 1 × door element of M 1305/W 906, for double-sided fabric/panel, universal for DIN left/right, consisting of door leaf frame, door upright frame incl. threshold plate and door roof frame, with hook tape W 840, with dead lock cylinder W 514


outer frame dimension door leaf: 855 × 2021 mm
outer frame dimension door frame (top):
870 × 450 mm
18.7 kg | B 950 × W 2500 × D 40 mm
Without fabric/print



Attention:
Use only
silicone edge
12 × 3 mm!

optional:
window element
W 414.01

Window element for W 405-Set




W 809.01

Aluminium | 1 × window element made of W 906 for double sided fabric/panel, in addition to door element W 405 and W 805

Window size: W 200 × H 800 mm

7.1 kg | W 828 × H 2362 × D 40 mm



Sliding door 1975 × 2500 mm




W 420.01

Aluminium | 1 × door element made of W 906 for fabric and panel on both sides, can be attached toolfree to the system groove of the **octawall 40** frame with hammer head screws, for installation in opening with clear dimensions W 950 × H 2500 mm, fabric dimension = outer frame dimension

element dimensions 1975 × 2500 × 80 mm,
sliding door dimensions 990 × 2480 × 40 mm

8.1 kg | W 1975 × H 2500 × D 80 mm



Components

octawall 40 classic




Ceiling element 950 x 2480 mm



D 931.01

Aluminium | 1 x frame of M 1305 used as ceiling element, for fabrics in combination with silicone edge M 1313, incl. 4 x connector Z 910 for system groove

10.17 kg | L 950 x W 2480 x H 40 mm



1 For flush mounting of ceiling element:
4 x T-connector
W 466


Wallwasher LED / 28W / 230V for system groove



M 1497

Aluminium | for uniform illumination of 1000 mm width and 2500 mm height (5700 Kelvin > Cri 90, 3600 lm, 28 W, 125 lm/W), for 230 V power source, for system groove 4.3 mm, space-saving and securely packed, with 16 high-power LEDs, PSU incl. cable (to the light 500 mm and from the power supply 2500 mm)

2.04 kg | L 812 x W 166 x H 263 mm






simple. space-saving. ready to use.

A show-stopper of a click system.

Sometimes results are just a few clicks away – not only in the digital world. **octawall 40 toolless** frames can be assembled without any tools. The extrusion design gives you the freedom to choose either fabric or panel. A universal door adds to the flexibility of the system. To ensure that nothing is forgotten, all frame components are conveniently packed in a roll-up bag. This translates into savings in time, storage and transport costs. Roll out the bag. Put the extrusions together. Attach fabric or panel. Done. Keep it simple – that's the golden thread running through **octawall 40 toolless**.



↗ octawall 40 toolless

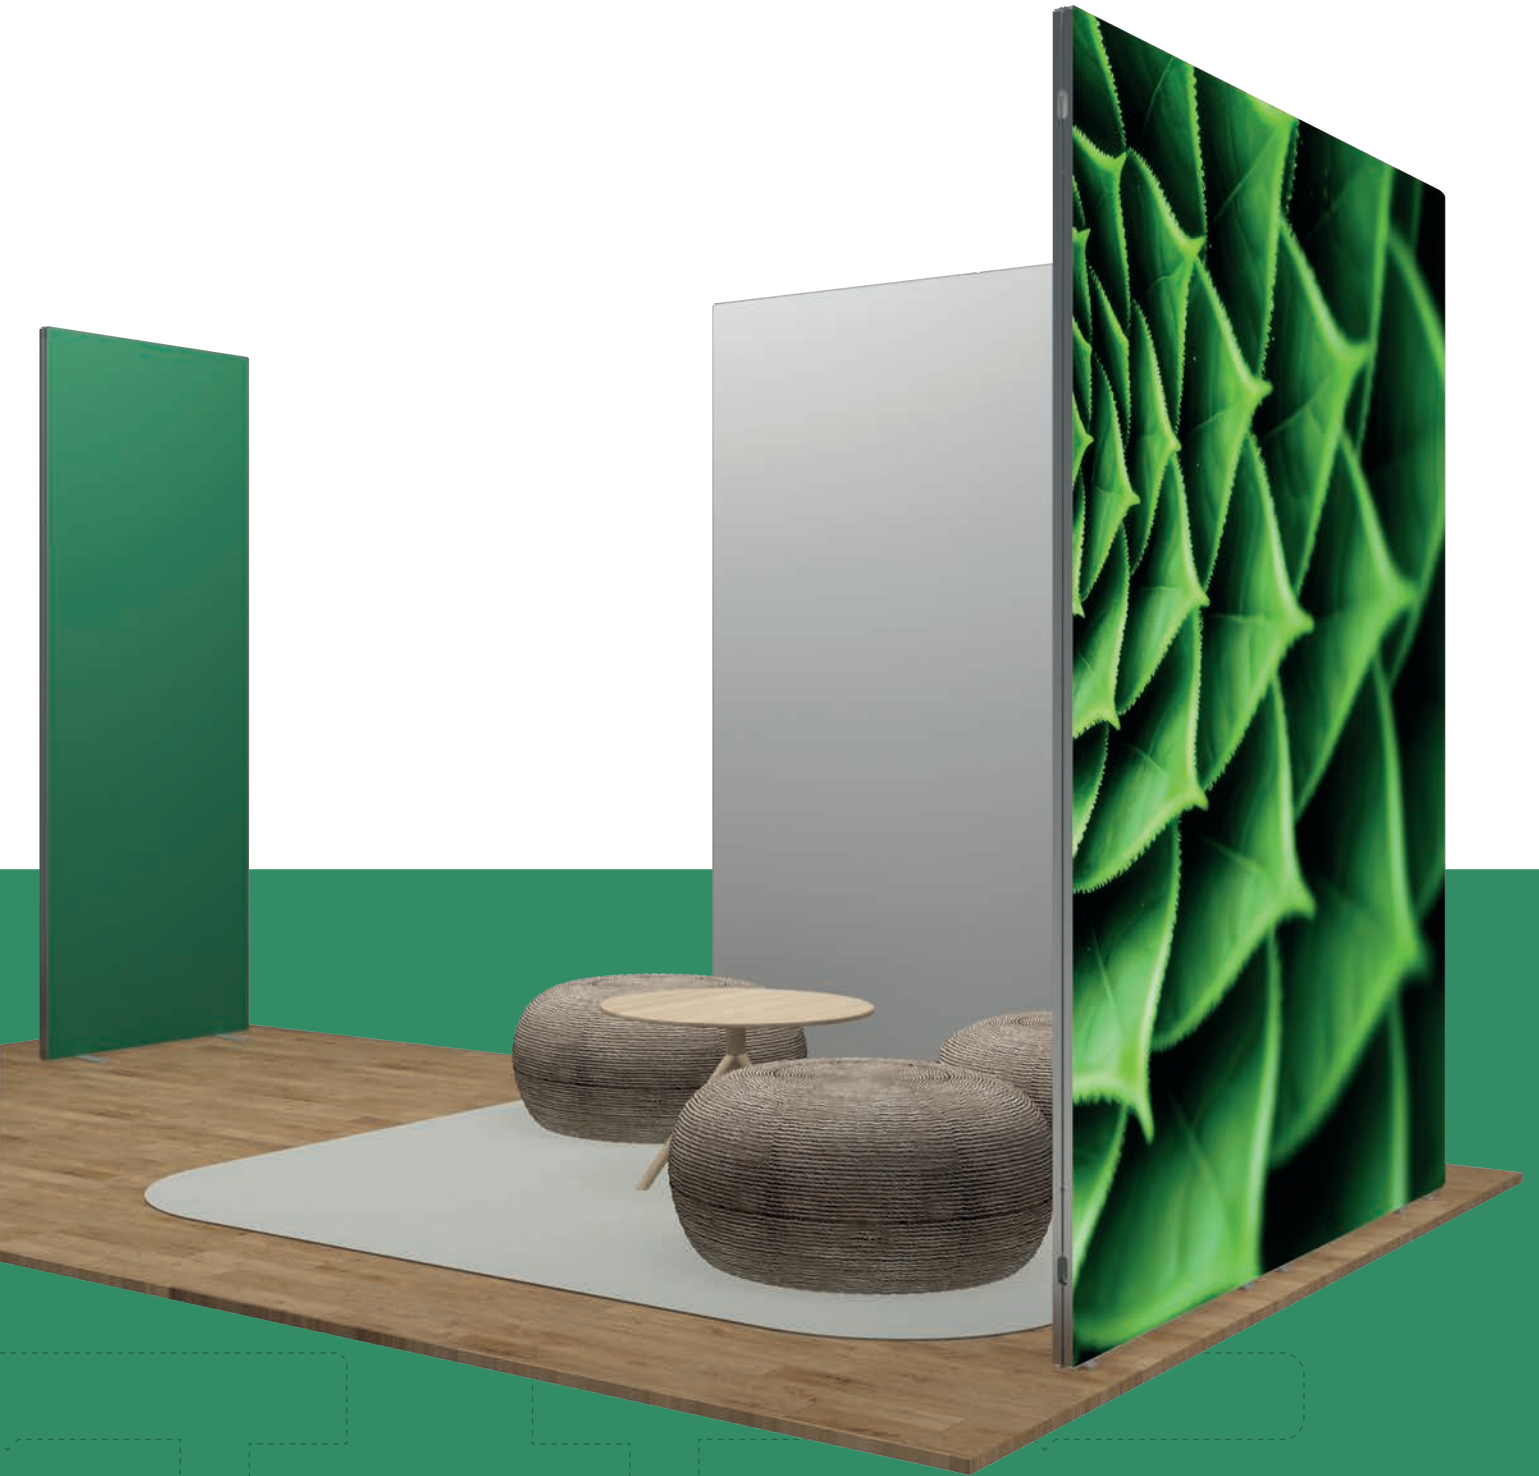



➤ Technical Features

octawall 40 toolless



lightweight




fabric + panel
W 906



silicone edge
graphics



plugable connection



shoulder bag

Quick and easy – of course you can have both.

Unpack. Plug together. Done. Thanks to the spring mechanism, the **octawall 40 toolless** frame is set up in no time at all. Firmly screwed to the extrusion on one side, the connector snaps in on the other with a *click*. Easy and time saving – a completely toolless installation.

Everything within your grasp thanks to a handy bag.

Many changes of location within a very short time? The shoulder bag accompanies you wherever you go. It holds all extrusions required for one frame, safely rolled up and protected against scratches. No more forgotten parts or transport problems.

Main application: everything.

Trade fairs, events, POS, or exhibitions: **octawall 40 toolless** can be used for all kinds of decorative or presentation purposes – even in combination with **octalumina 40** and **maxima 40**.



octawall 40 toolless: components

elegant aluminium surface / with system groove / with toolless connection / extremely lightweight / for double-sided fabric/panel / for silicone edge graphics

Attention:
freestanding
only for double-
sided fabric

Frame center-split 950 x 2480 mm




**Frame
custom size:
W 403M**

W 402M.01


Aluminium | 1 x frame of W 906, for double-sided fabric, with plugable connection, incl. 2 x rotatable foot plates M 1956 and 1 x bracing, incl. 1 x shoulder bag W 494, 4 x corner connector W 916M, 2 x connector OL 240M, 3 x mounting-set M 1496

8.93 kg | W 950 x H 2480 x D 40 mm

Without fabric/print
Drillings for cable management available on request



Frame center-split 950 x 2480 mm




**Frame
custom size:
W 413M**

W 412M.01

Aluminium | 1 x frame of W 906, for double-sided fabric/panel, with plugable connection, incl. 2 x adjustable foot C 440/F and 1 x bracing, incl. 1 x shoulder bag W 494, 4 x corner connector W 916M, 2 x connector OL 240M, 3 x mounting-set M 1496, optional with hook tape W 840

8.11 kg | W 950 x H 2480 x D 40 mm

Without fabric/print
Drillings for cable management available on request




Fixing-Set for frames



M 1496.37

Aluminium | for connection of frame elements

0.1 kg | L 100 x W 39 x H 39 mm



Components

octawall 40 toolless



Transport Bag rolled



W 494.90

Nylon, black | 1 × shoulder bag with hook-and-loop tape for closing, for octawall 40 toolless, incl. adjustable shoulder strap

31 kg | L 1400 × W 900 × H 5 mm

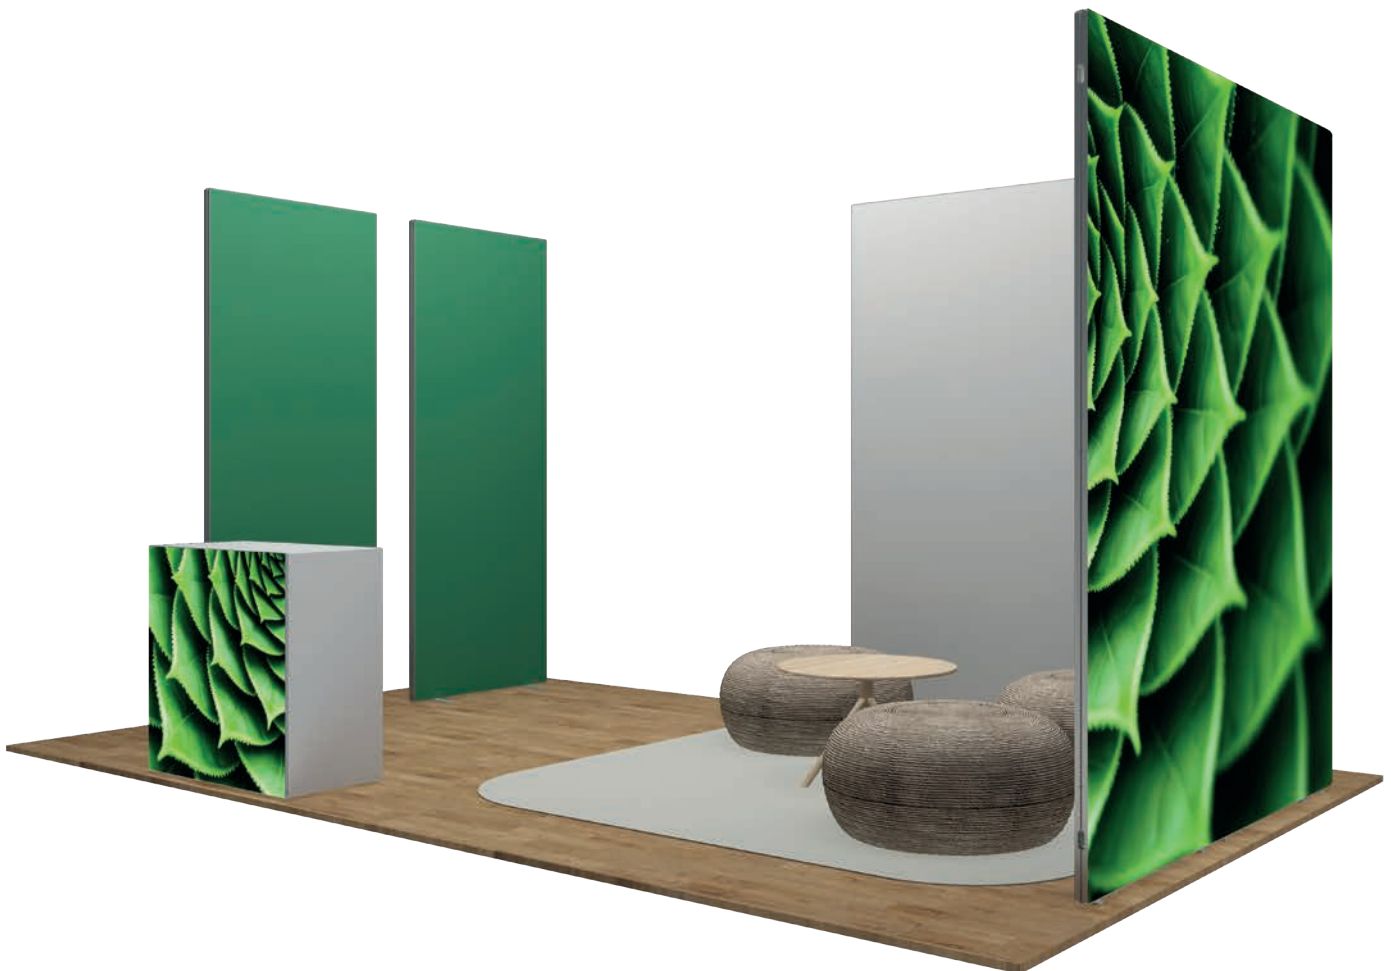




➤ In Action

octawall 40





exhibition systems
project solutions
cleanroom solutions

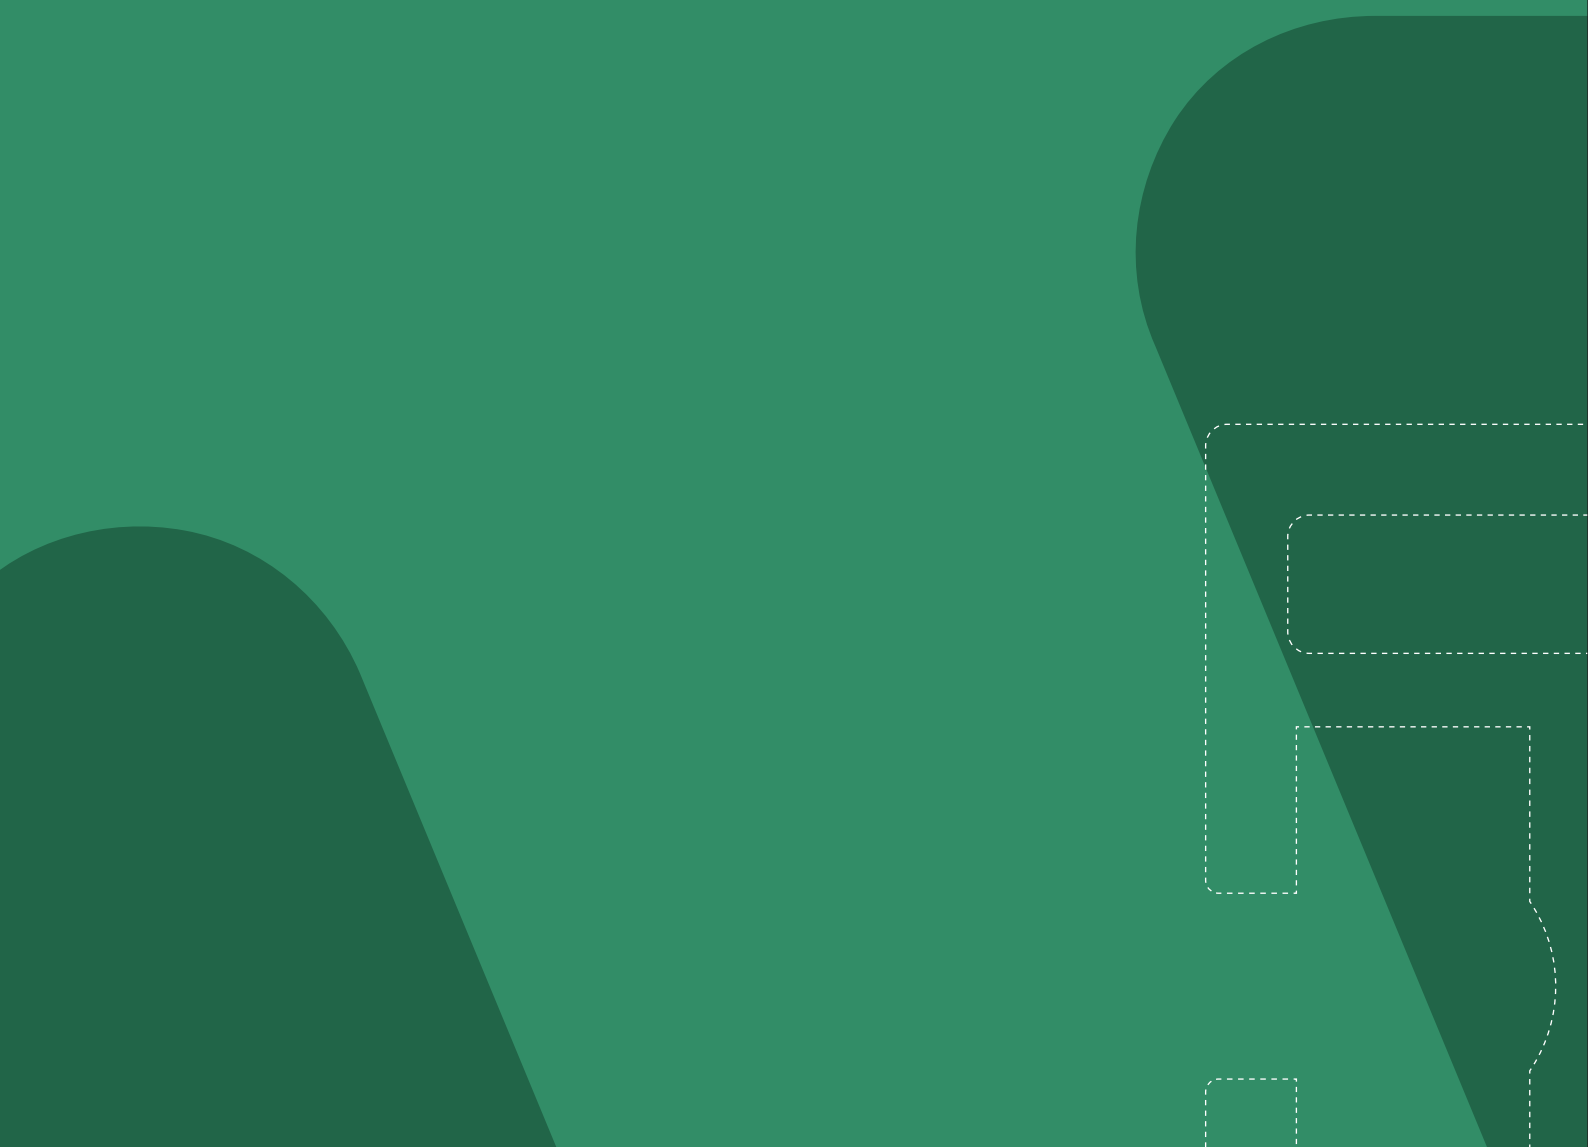

octanorm

OCTANORM®-Vertriebs-GmbH

für Bauelemente
Raiffeisenstraße 39
70794 Filderstadt, Germany

T +49 711 77003-0

E info@octanorm.de

Adria

↗ octanormadria.com

Australia

↗ octanorm.com.au

Belgium

↗ octanorm.be

China

↗ octanorm.cn

Emirates

↗ octanormemirates.net

España

↗ octanorm.es

France

↗ octanorm.fr

Hellas

↗ octanorm.gr

Italia

↗ octanorm.it

Japan

↗ octanorm.co.jp

México

↗ octanorm.com.mx

Nigeria

↗ it-al.design

Nordic

↗ octanorm.se

North America

↗ octanormna.com

Polska

↗ octanorm.pl

South Africa

↗ octanorm.co.za

UK

↗ octanorm.co.uk

↗ octanorm.com